


BLAZER® ENGINEERING DATA




The following information is compiled to assist the design professional in selecting the appropriate fastener for the application. This data is compiled from fastener standards and independent tests. An engineering professional should be consulted to determine expected loads on the connection, environmental effects, and any other conditions that could effect the performance of the fastener. Selecting a fastener is the responsibility of the engineer and changes to a fastener should not be made without approval. Using the wrong fastener can lead to failure.

TFC WILL NOT WARRANTY, EITHER EXPRESSED OR IMPLIED, THE USE OF THIS INFORMATION.

TECHNICAL DATA



BLAZER® self-drilling fasteners are produced and perform to SAEJ78, ASME B18.6.4 and AISI TS-4-02 specifications. Conforms to ICCES AC118 acceptance criteria for tapping screw fasteners.

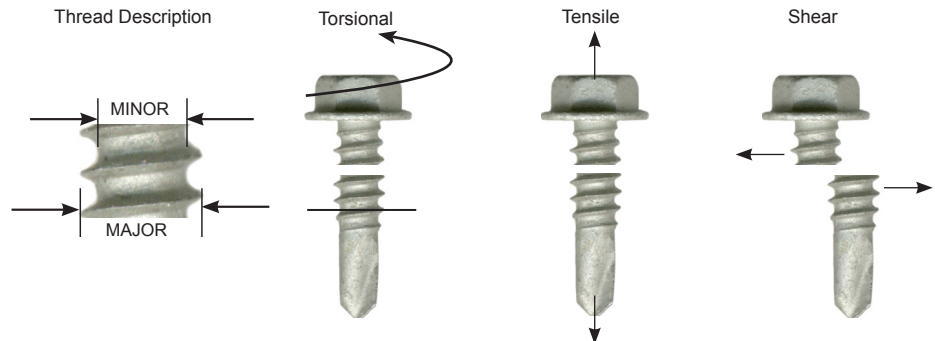

Physical Properties

| Fastener Diameter | Nominal Screw Diameter | Major Diameter (inch) | | Minor Diameter (inch) | | Area Of Minor Dia. (sq in.) | Torsional (Lb-In.) | Tensile (Pounds) | Shear (Pounds) |
|-------------------|------------------------|-----------------------|-------|-----------------------|-------|-----------------------------|--------------------|------------------|----------------|
| | | Max | Min | Max | Min | | | | |
| #6-20 | 0.138 | 0.139 | 0.135 | 0.104 | 0.099 | 0.0077 | 24 | 1,125 | 750 |
| #8-18 | 0.164 | 0.166 | 0.161 | 0.122 | 0.116 | 0.0106 | 42 | 1,575 | 1,000 |
| #10-16 | 0.190 | 0.189 | 0.183 | 0.141 | 0.135 | 0.0143 | 61 | 2,100 | 1,400 |
| #10-24 | 0.190 | 0.190 | 0.182 | 0.144 | 0.137 | 0.0147 | 65 | 3,400 | 2,275 |
| #12-14 | 0.216 | 0.215 | 0.209 | 0.164 | 0.157 | 0.0194 | 92 | 2,778 | 2,000 |
| #12-24 | 0.216 | 0.216 | 0.209 | 0.189 | 0.185 | 0.0269 | 100 | 3,188 | 2,100 |
| 1/4-14 | 0.250 | 0.246 | 0.240 | 0.192 | 0.185 | 0.0269 | 150 | 3,850 | 2,600 |
| 1/4-20 | 0.250 | 0.250 | 0.242 | 0.218 | 0.214 | 0.0360 | 156 | 4,275 | 2,700 |
| #18-9 | 0.306 | 0.306 | 0.300 | 0.217 | 0.209 | 0.0343 | 196 | 4,550 | 2,576 |
| 5/16-12 | 0.313 | 0.315 | 0.306 | 0.244 | 0.236 | 0.0702 | 290 | 5,439 | 3,264 |

Material: C1018-C1022 / 410 SS
 Heat Treatment: Case Harden
 Case Hardness: 52-58 Rockwell C
 Case Depth:
 #6 Dia = .002" - .007"
 #8, #10, #12 Dia = .004" - .009"
 1/4" = .005" - .011"
Core Hardness
 Carbon Steel: 32-40 Rockwell C
 410 Stainless: 42-48 Rockwell C
 Ductility: 5 Degree minimum bend

| English to Metric | Formula to Use |
|--|----------------------|
| Decimal to Millimeters | Decimal x 25.4 |
| PSI to Newton / Millimeters ² | PSI x .007 |
| Pounds Force to Newtons | Pounds Force x 4.448 |


| Gauge Thickness | Decimal | Metric |
|-----------------|---------|--------|
| 29 GA | .013" | .33mm |
| 28 GA | .015" | .38mm |
| 26 GA | .018" | .46mm |
| 24 GA | .024" | .61mm |
| 22 GA | .030" | .76mm |
| 20 GA | .036" | .91mm |
| 18 GA | .048" | 1.22mm |
| 16 GA | .060" | 1.52mm |
| 14 GA | .075" | 1.91mm |
| 12 GA | .105" | 2.67mm |
| 1/8" | .125" | 3.18mm |
| 10 GA | .135" | 3.43mm |
| 1/4" | .250" | 6.35mm |
| 5/16" | .312" | 7.92mm |
| 3/8" | .375" | 9.53mm |
| 1/2" | .500" | 12.7mm |

DISCLAIMER: ALL TEST RESULTS AND SPECIFICATIONS ARE A RESULT OF LABORATORY TESTS. APPROPRIATE SAFETY FACTORS SHOULD BE USED BY THE USER OR SPECIFIER. DETERMINING THE PROPER FASTENER IS THE RESPONSIBILITY OF THE USER OR SPECIFIER. SINCE APPLICATION CONDITIONS VARY AND ARE UNCONTROLLABLE BY TFC, WE ASSUME NO LIABILITY FOR THE USE OF THIS INFORMATION.

PULLOVER TEST RESULTS

These pullover results are for self-sealing fasteners listed in this catalog.

Pounds - Ultimate Average



Note: Estimated pullover for fasteners without sealing washers can be calculated using the following formula per AISI.

Pullover force = 1.5 -x- Thickness of the member in contact with the screw head.
 -x- Larger of the screw head diameter or washer diameter. -x- Tensile strength of the member in contact with the screw head.

| Steel Thickness | BOND-SEALER | | FLANGE SEALER | ZINC CAP HEAD | STAINLESS CAP HEAD |
|-----------------|-------------|---------|---------------|---------------|--------------------|
| | 12.7MM OD | 15MM OD | | | |
| 22 ga | 945 | 1,249 | 1,298 | 1,647 | 1,298 |
| 24 ga | 704 | 1,056 | 1,102 | 1,310 | 1,102 |
| 26 ga | 519 | 654 | 692 | 794 | 692 |