


# GP CONCEALOR®

## TRI-SEAL AZR COATED

**THE ONLY**  
Carbon Steel Pancake Screw  
that is Miami-Dade Approved  
for >1,000 Hours Salt Spray  
Code Requirements!

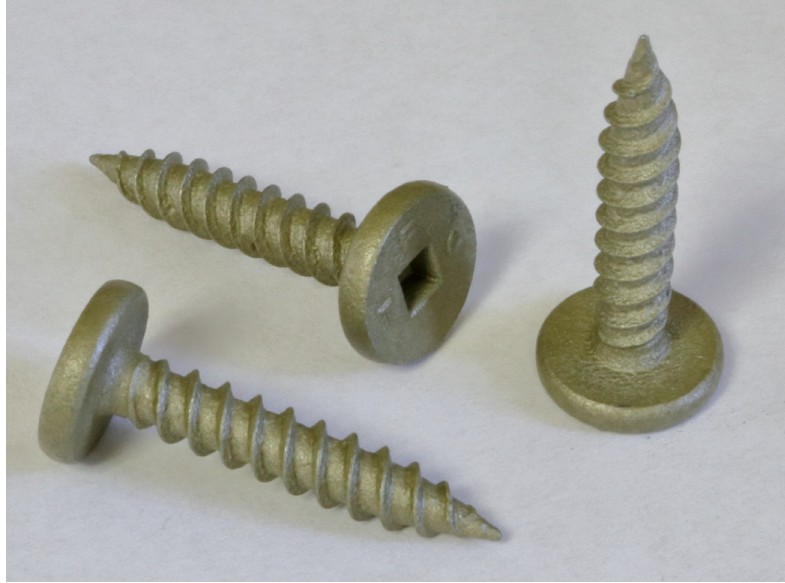

**MIAMI-DADE LISTING NUMBER**  
17-0213.01 (1,000 hrs)  
Roofing Fastener and Batten Plate Listing

**CORROSION TEST RESULTS (MIAMI-DADE SPECIFICATIONS)**  
Per TAS 114-95 Appendix E | Salt Fog Evaluation Per ASTM G85  
1,000 Hours

Corrosion tests were conducted at a Miami Dade approved laboratory.

After 1,000 hours of testing, notice how TRI-SEAL® AZR Coating provides greater corrosion protection than screws that are Miami-Dade Approved for less than 1,000 hrs.



**Be aware that screws with a "less than a 1,000hrs" listing will not meet most Florida Building Codes for Roofing Fasteners. SEE BUILDING CODE FOR ALLOWABLE USES.**

### SIZES



	Description	Part Number	Box Quantity	WT Per Box
A	#10-13 X 1" GP CONCEALOR TRI-SEAL® AZR Coating	10100SPCGCSTSAZR	5,000	36.0 lbs.
B	#10-13 X 1-1/2" GP CONCEALOR TRI-SEAL® AZR Coating	10150SPCGCSTSAZR	3,000	31.0 lbs.
C	#10-13 X 2" GP CONCEALOR TRI-SEAL® AZR Coating	10200SPCGCSTSAZR	1,500	19.0 lbs.

*Bagged 250 pcs. per bag for your convenience!*

### TECHNICAL INFORMATION

Description: #10-13 Gimlet Point Self-Tapping screw  
Head Style: Pancake head  
Drive System: #2 square recess  
Head Thickness: .095"  
Material: C1018 carbon steel  
Heat Treat: Case hardened to ANSI/ASME B18.6.4 specification  
Finish: TRI-SEAL® AZR Coating  
Salt Spray: 1,000hrs. Salt Spray Per ASTM G85)  
Application: Steel (<=20ga) to wood. Can be used in treated lumber  
Thread Detail: Major Diameter = .195" Minor Diameter = .125"

### Pullout - Average Ultimate in Pounds

Fastener Dia. & Point	Wood Type						
	1/2" Ply	5/8" Ply	3/4" Ply	7/16" OSB	19/32" OSB	23/32" OSB	2 x 4 SYP
#10-13 GP	375	505	654	166	357	442	737

Farabaugh Engineering Test: Project No. T279-10 & \* T282-15

### Fastener Strength

Torsional	60 lb-in min.
Tensile	1,520 lbs. min.
Shear	1,150 lbs. min.

**Do not use  
impact drivers!**

### Installation

**WARNING! Using impact drivers can break the screw!**

Use a 2,500 RPM max variable speed screw drivers with torque control or depth sensing nosepiece.



**CONCEALOR Pancake Head Screws with the square recess provides the best stability during installation...and no stripping of the recess!**

Copyright 2017 | Triangle Fastener Corporation | Pittsburgh, PA

**TRIANGLE FASTENER CORPORATION**

Visit our website for the most up-to-date product and technical information!

800.486.1832 | [www.trianglefastener.com](http://www.trianglefastener.com)

MD300.0617