

E-Z PRODUCTS

Self-Drilling Drywall Anchors

The original! Fast and easy self-drilling anchors.

E-Z Anchor®, E-Z Anchor Plastic™, E-Z Mini Anchor®, E-Z Hanger®, E-Z Anchor Lite™, E-Z Toggle™, E-Z Anchor Plastic Plus™

Product Specifications


Product Material:
Zinc die cast Nylon

Drilling Capacity:
3/8", 1/2" and 5/8"
gypsum wallboard


Applications

- | | |
|-----------------------|------------------------------|
| Electrical Fixtures | Signs |
| Thermostats | Bulletin Boards |
| HVAC Fixtures | Control Systems |
| Plumbing Fixtures | Decorative Wall Hangings |
| Bathroom Accessories | Office Material Holders |
| Shelving and Supports | Smoke Detectors |
| Mirrors | Clocks |
| Picture Frames | Kitchen Accessories |
| Brackets | Doorbells |
| Plaques and Awards | Telecommunications Equipment |
| Closet Organizers | Chalk Boards |
| Coat Racks | Remote Control Boxes |
| Curtain Rods | |


E-Z Anchor Lite




E-Z Mini Anchor



E-Z Anchor



E-Z Toggle



Selector Guide

	Anchor Description	Anchor Material	Part Number	Quantity	Maximum Fixture Thickness
Light Duty	E-Z Anchor Lite™	White Nylon	5006902	100 Count	3/4"
	E-Z Mini Anchor™	Zinc	5033902 5034902	100 Count 50 #6 x 1 1/4" SMS 50 #8 x 1 1/4" SMS	3/4"
Medium Duty	E-Z Anchor®	Zinc White Nylon	5000902 5003902	100 Count 100 Count	3/4"
	E-Z Toggle™	Zinc	5014901 5017901	50 Count 50 #8 x 2 1/8" Pan SMS 50 Count 50 #8 x 2 1/8" Pan Large Washer Face SMS	5/8"

Performance Data

	Pullout (Ultimate average lbs.) Gypsum Thickness			Shear (Ultimate average lbs.) Gypsum Thickness		
	3/8"	1/2"	5/8"	3/8"	1/2"	5/8"
E-Z Anchor Lite	25	30	40	80	90	120
E-Z Mini Anchor	30	40	50	90	110	140
E-Z Anchor	40	50	75	135	150	200
E-Z Toggle	70	85	150	200	230	300

Installation Guidelines

Light Duty & Medium Duty E-Z Anchors

- Place #2 Phillips screwdriver into recess of E-Z Anchor Lite, E-Z Mini Anchor, E-Z Anchor or E-Z Anchor Plastic Plus.
- Press into drywall while turning the anchor clockwise until it is seated flush with wall.
- Place fixture in position over installed E-Z Anchor Lite, E-Z Mini Anchor, E-Z Anchor, or Plastic Plus. Insert screw with screw driver. Tighten fixture in place.

Heavy Duty E-Z Toggle

- Place #2 Phillips screwdriver into recess of E-Z Toggle. Press into drywall while turning the anchor clockwise until it is seated flush with wall and arrows on head are parallel to stud.
- Place fixture in position over installed E-Z Toggle. Insert screw and push through E-Z Toggle to engage clamp.
- Continue turning screw until tight. The clamp will move back against the drywall as the screw turned.


Introducing the NEW E-Z Anchor

Twist-N-Lock™

FEATURES

- ▶ Self-drilling
- ▶ Unique point design provides extra installation stability.
- ▶ Anchor expands for maximum holding power.
- ▶ Hangs up to 75 lbs.* in vertical 1/2" drywall or 50% more than standard plastic anchors.
- ▶ Seats flush to the wall and does not tear or bubble the surrounding area.
- ▶ Holds fixtures up to 3/4" thick.
- ▶ Small, 1/2" diameter head radius provides maximum opportunity to attach fixtures requiring close-to-edge attachments. (*Competitor head radius is a full 1/8" larger*)

* Hangs up to 65 lbs. in vertical 3/8" drywall
 * Hangs up to 80 lbs. in vertical 5/8" drywall

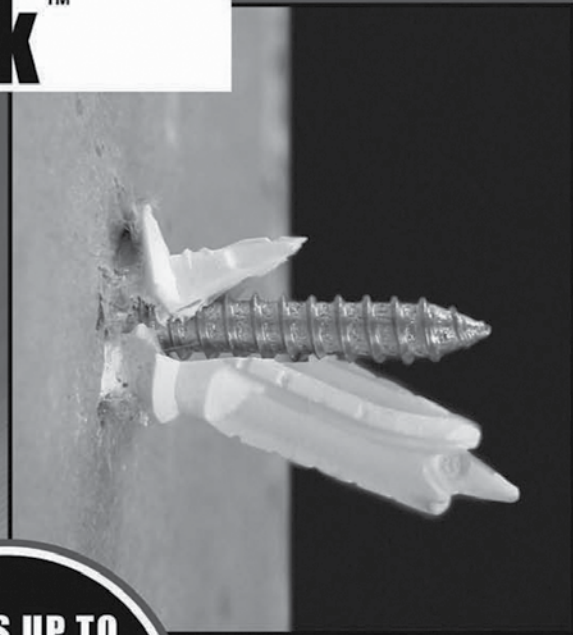

SCREW LENGTH REQUIREMENTS

Use with standard #8 diameter gimlet point sheet metal screws.



- ▶ **In 3/8" drywall:** Minimum screw length is 1-1/8" plus attachment thickness. Maximum screw length required is 1-7/8" to secure 3/4" fixture thickness.
- ▶ **In 1/2" drywall:** Minimum screw length is 1-1/4" plus attachment thickness. Maximum screw length required is 2" to secure 3/4" fixture thickness.
- ▶ **In 5/8" drywall:** Minimum screw length is 1-3/8" plus attachment thickness. Maximum screw length required is 2-1/8" to secure 3/4" fixture thickness.

HANGS UP TO
75 **LBS**
IN 1/2" VERTICAL DRYWALL

U.S. Patent No.
 7,143,497 & 7,001,124
 Other Patents Pending

PART NUMBERS


- Bulk Part #5061900 (4,500 pieces per box)
 100 ct. Part #5061902 (Master Ctn. with 10 - 100 Ct. boxes)

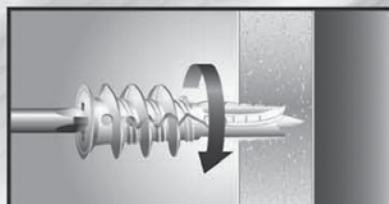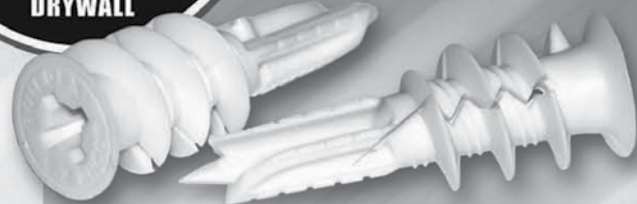

1. Place #2 Phillips screwdriver into recess of Twist-N-Lock E-Z Anchor. Press into drywall while turning the anchor clockwise until it is seated flush with the wall.



2. Place fixture in position over installed E-Z Anchor. Insert screw with screwdriver. Tighten fixture in place. Insert #8 diameter screw.

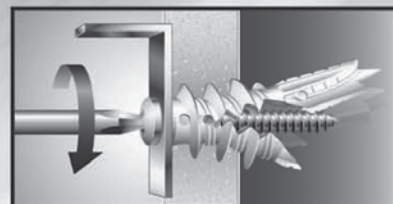

3. Behind the drywall, the E-Z Anchor expands to provide extra support.