


**Beam Clamp**

- Easy installation to beam flanges up to 1/2".
- Supports 1/4" and 3/8" threaded rod, S-hooks, electrical boxes, conduit and bridle rings.
- Accommodates standard 1/4"-20 or #10-24 threaded bridle rings.

Note: When using rigid conduit on P Series, use next size larger clip (1/2" rigid use 12P).

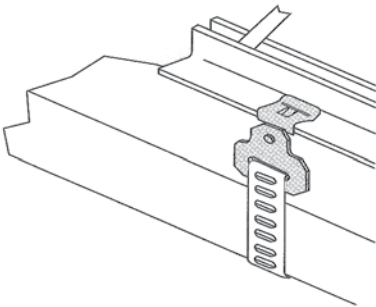


**Strap Hanger Clips**

- Simple solution for supporting of air duct.
- Accepts wider strap widths up to 1 1/4".
- The new clips are made from galvanized steel instead of spring steel. This expands the use to more applications, especially when used with other plated parts like our BC200 beam clamp.

Note: Loads indicated are for CADDY® fasteners only.

Improved galvanized and plated components for more demanding environments.

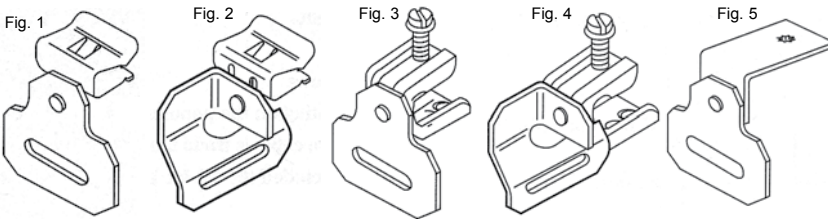

Catalog Number	Fig. No.	Flange Thickness	Load Rating	Qty. Per Box
MSS24	1	1/8" to 1/4"	200#	50
MSS58	1	5/16" to 1/2"	200#	50
MSS912	1	1	9/16" to 3/4"	200#
50				
MSR24	2	1/8" to 1/4"	200#	50
MSR58	2	5/16" to 1/2"	200#	50
MSR912	2	2	9/16" to 3/4"	200#
50				
MSSBC200	3	1/8" to 5/8"	100#	50
MSRBC200	4	1/8" to 5/8"	100#	50
MSSCPNA	5	Strap hanger to angle bracket.	160#	50




Fig. 1

**Mounting Bracket For Any Electric Box**

- Easily attaches 4" and 4 11/16" outlet boxes to metal stud.
- Support leg eliminates movement of box in wall.
- Can be attached to metal or wood stud.
- Offset to eliminate dry wall bulges.
- Delivers compliance with:  
NEC Article 300-4(d) when used for 4" and 4 11/16" outlet boxes to metal or wood studs.  
CEC Rule 12-3012 for 4" and 4 11/16" outlet boxes to metal or wood studs.






Fig. 2

Catalog Number	Fig. No.	Application	Box Size(s)	Stud Depth	Qty. Per Box
H23	1	U.S.	4" sq. & 4 11/16"	2 1/2" & 3 1/2"	100
H2STC	1	Canada	4" sq. & 4 11/16"	2 1/2" & 3 1/2"	100
H4	1	U.S.	4" sq. & 4 11/16"	4"	50
H6	1	U.S.	4" sq. & 4 11/16"	6"	50
H46TC	1	Canada	4" sq. & 4 11/16"	4" & 6"	100
HS3	2	U.S. & Canada	Switch	2 1/2" & 3 1/2"	100

### Universal Beam Clamp

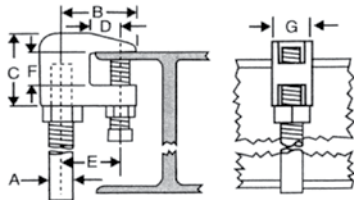

Model Number	Photo Reference							Appx. Wt. Per 100 (pcs.)	Maximum Recommended Load (lbs.)	Carton Quantity
	A	B	C	D	E	F	G			
103 - 101	3/8"	1"	1 1/2"	1/2"	1"	3/4"	7/8"	33	400	100
104 - 101	1/2"	1"	1 1/2"	1/2"	1"	3/4"	7/8"	33	500	100
105 - 101	5/8"	1 1/2"	1 1/2"	1/2"	1"	3/4"	1"	22	600	50
106 - 101	3/4"	1 7/8"	1 3/4"	5/8"	1 3/8"	1"	1 1/4"	88	800	50
107 - 101	7/8"	2"	1 3/4"	5/8"	1 1/2"	1"	1 1/4"	79	1200	25

Size range: 3/8" through 7/8" rod sizes.

Material: Malleable iron casting with a hardened cup point set screw and lock nut.



Finish: Black. Ordering: Specify rod size, finish and model number.

Approvals: UL Listed for top or bottom of Beam. FM Approved for NFPA 13, maximum rated pipe size. Complies with Manufacturers Standardization Society SP-69 (Type 19 & 23).

Function: Recommended for attaching hanger rod to top or bottom flange of a beam or bar joist, where the thickness of a joist or flange does not exceed 3/4". The open back design permits rod adjustment.

Installation: Must install in an upright position. Also available in: Electro-Plated Zinc and 304 Stainless Steel.

### Wide Throat Beam Clamp

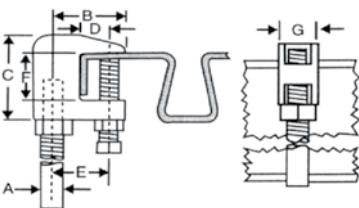

Model Number	Photo Reference							Appx. Wt. Per 100 (pcs.)	Maximum Recommended Load (lbs.)	Carton Quantity
	A	B	C	D	E	F	G			
113-101	3/8"	1-5/8"	2"	3/4"	1"	1 1/4"	7/8"	28	400	50
114-101	1/2"	1-5/8"	2"	3/4"	1"	1 1/4"	7/8"	34	500	50
115 - 101	5/8"	1 3/4"	2 1/4"	3/4"	1 1/4"	1 1/4"	1"	66	600	50
116 - 101	3/4"	1 7/8"	2 3/8"	3/4"	1 3/8"	1 1/4"	1 1/4"	83	800	50

Size range: 3/8" through 3/4" rod sizes.

Material: Malleable iron casting with a hardened cup point set screw and lock nut.



Finish: Black. Ordering: Specific rod size, finish and model number.

Approvals: UL Listed for top or bottom of Beam. FM Approved for NFPA 13, maximum rated pipe size. Complies with Manufacturers Standardization Society SP-69 (Type 19 & 23).

Function: Recommended for attaching hanger rod to top or bottom flange of a beam or bar joist construction. The open back design permits rod adjustment.

Installation: Must install in an upright position. Also available in: Electro-plated zinc.

### Steel C-Clamp



Model Number	Photo Reference					Maximum Recommended Load (lbs.)	Appx. Wt. Per 100 (pcs.)	Carton Quantity
	A	B	C	D	E			
203 - 100	3/8"	3/8"	2 3/8"	2 5/16"	13/16"	400	41	100
203 - 101 w/locknut	3/8"	3/8"	2 3/8"	2 5/16"	13/16"	400	45	100
204 - 100	1/2"	1/2"	2 3/8"	2 5/16"	13/16"	500	43	100
204 - 101 w/locknut	1/2"	1/2"	2 3/8"	2 5/16"	13/16"	500	46	100
205 - 100	5/8"	5/8"	2 3/8"	2 1/4"	13/16"	550	58	50
205 - 101 w/locknut	5/8"	5/8"	2 3/8"	2 1/4"	13/16"	550	66	50
206 - 100	3/4"	3/4"	2 3/8"	2 1/4"	13/16"	600	80	50
206 - 101 w/locknut	3/4"	3/4"	2 3/8"	2 1/4"	13/16"	600	86	50
207 - 100	7/8"	3/4"	3"	3 1/4"	13/16"	900	168	25
207 - 101 w/locknut	7/8"	3/4"	3"	3 1/4"	13/16"	900	176	25

Size range: 3/8" through 7/8" rod sizes.

Material: Carbon steel with a hardened cup point set screw and available with or without a lock nut.

Finish: Black. Ordering: Specify rod size; finish; and model number.

Approvals: UL Listing and FM Approved for NFPA 13, maximum rated pipe size. Complies with Federal Specification WW-H 171 E (Type 23) and Manufacturers Standardization Society SP-69 (Type 23).

Function: Designed for structural attachment of hanger rod to bottom flange of a metal beam, purlins, channel or angle iron. The hanger rod should make contact with the beam flange to ensure full engagement.

Also available in: Electro plated zinc and 304 stainless steel. Maximum pipe size: 4".