
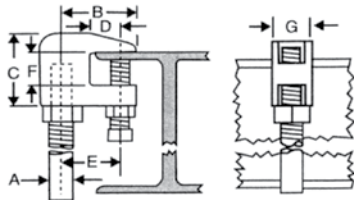


### Universal Beam Clamp



Model Number	Photo Reference							Appx. Wt. Per 100 (pcs.)	Maximum Recommended Load (lbs.)	Carton Quantity
	A	B	C	D	E	F	G			
103 - 101	3/8"	1"	1 1/2"	1/2"	1"	3/4"	7/8"	33	400	100
104 - 101	1/2"	1"	1 1/2"	1/2"	1"	3/4"	7/8"	33	500	100
105 - 101	5/8"	1 1/2"	1 1/2"	1/2"	1"	3/4"	1"	22	600	50
106 - 101	3/4"	1 7/8"	1 3/4"	5/8"	1 3/8"	1"	1 1/4"	88	800	50
107 - 101	7/8"	2"	1 3/4"	5/8"	1 1/2"	1"	1 1/4"	79	1200	25

Size range: 3/8" through 7/8" rod sizes.

Material: Malleable iron casting with a hardened cup point set screw and lock nut.



Finish: Black. Ordering: Specify rod size, finish and model number.

Approvals: UL Listed for top or bottom of Beam. FM Approved for NFPA 13, maximum rated pipe size. Complies with Manufacturers Standardization Society SP-69 (Type 19 & 23).

Function: Recommended for attaching hanger rod to top or bottom flange of a beam or bar joist, where the thickness of a joist or flange does not exceed 3/4". The open back design permits rod adjustment.

Installation: Must install in an upright position. Also available in: Electro-Plated Zinc and 304 Stainless Steel.

### Wide Throat Beam Clamp

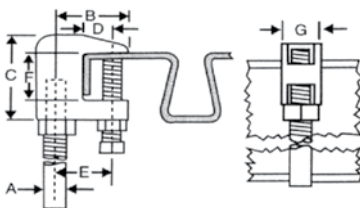

Model Number	Photo Reference							Appx. Wt. Per 100 (pcs.)	Maximum Recommended Load (lbs.)	Carton Quantity
	A	B	C	D	E	F	G			
113-101	3/8"	1-5/8"	2"	3/4"	1"	1 1/4"	7/8"	28	400	50
114-101	1/2"	1-5/8"	2"	3/4"	1"	1 1/4"	7/8"	34	500	50
115 - 101	5/8"	1 3/4"	2 1/4"	3/4"	1 1/4"	1 1/4"	1"	66	600	50
116 - 101	3/4"	1 7/8"	2 3/8"	3/4"	1 3/8"	1 1/4"	1 1/4"	83	800	50

Size range: 3/8" through 3/4" rod sizes.

Material: Malleable iron casting with a hardened cup point set screw and lock nut.



Finish: Black. Ordering: Specific rod size, finish and model number.

Approvals: UL Listed for top or bottom of Beam. FM Approved for NFPA 13, maximum rated pipe size. Complies with Manufacturers Standardization Society SP-69 (Type 19 & 23).

Function: Recommended for attaching hanger rod to top or bottom flange of a beam or bar joist construction. The open back design permits rod adjustment.

Installation: Must install in an upright position. Also available in: Electro-plated zinc.

### Steel C-Clamp



Model Number	Photo Reference					Maximum Recommended Load (lbs.)	Appx. Wt. Per 100 (pcs.)	Carton Quantity
	A	B	C	D	E			
203 - 100	3/8"	3/8"	2 3/8"	2 5/16"	13/16"	400	41	100
203 - 101 w/locknut	3/8"	3/8"	2 3/8"	2 5/16"	13/16"	400	45	100
204 - 100	1/2"	1/2"	2 3/8"	2 5/16"	13/16"	500	43	100
204 - 101 w/locknut	1/2"	1/2"	2 3/8"	2 5/16"	13/16"	500	46	100
205 - 100	5/8"	5/8"	2 3/8"	2 1/4"	13/16"	550	58	50
205 - 101 w/locknut	5/8"	5/8"	2 3/8"	2 1/4"	13/16"	550	66	50
206 - 100	3/4"	3/4"	2 3/8"	2 1/4"	13/16"	600	80	50
206 - 101 w/locknut	3/4"	3/4"	2 3/8"	2 1/4"	13/16"	600	86	50
207 - 100	7/8"	3/4"	3"	3 1/4"	13/16"	900	168	25
207 - 101 w/locknut	7/8"	3/4"	3"	3 1/4"	13/16"	900	176	25

Size range: 3/8" through 7/8" rod sizes.

Material: Carbon steel with a hardened cup point set screw and available with or without a lock nut.

Finish: Black. Ordering: Specify rod size; finish; and model number.

Approvals: UL Listing and FM Approved for NFPA 13, maximum rated pipe size. Complies with Federal Specification WW-H 171 E (Type 23) and Manufacturers Standardization Society SP-69 (Type 23).

Function: Designed for structural attachment of hanger rod to bottom flange of a metal beam, purlins, channel or angle iron. The hanger rod should make contact with the beam flange to ensure full engagement.

Also available in: Electro plated zinc and 304 stainless steel. Maximum pipe size: 4".