





**Box Support Brackets**

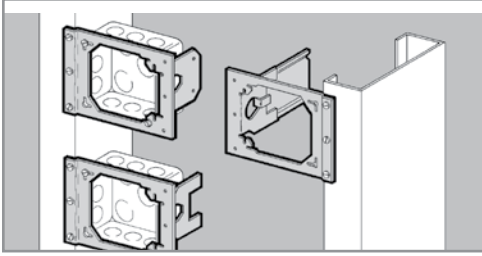

- Supports either 4" square or 411/16" boxes
- Available for 2 1/2", 3 1/2", 4" and 6" metal studs.
- Attaches with screws to either side of metal stud.
- Brackets may be piggy-backed in series on same side of metal stud.
- Finish: Pre-galvanized

Catalog number	Metal stud size	Box Qty.	Patent No.
BB4-23	2 1/2", 3 1/2"	100	#4757908
BB4-4	4"	100	#4757908
BB4-6	6"	25	#4757908
BB4-XT6	Extends BB3, BB4-23, & BB4-4 for use on 6" Deep Studs	100	#4757908

Read safety/installation instruction sheets in packages before use. These products are designed for positioning only. No load rating.

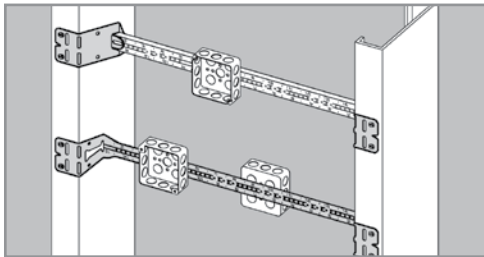


**Box Mounting Brackets**

- Supports boxes located between studs 16" or 24" on center.
- Adjustable design fits both 1 1/2" and 2 1/8" deep boxes
- Boxes attach easily with sheet metal screws through pre-punched holes
- Bar is marked in 1/2" increments.
- Accommodates 4" thru 24" stud spacing using BB2-ac adapters.
- Finish: Pre-galvanized

Catalog number	Stud spacing	Box Depth	Box Qty.
BB2-16	16"	1 1/2"	50
BB2-24	24"	1 1/2"	50

Read safety/installation instruction sheets in packages before use. These products are designed for positioning only. No load rating.

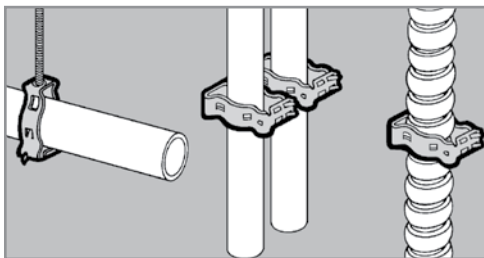

**Conduit Fasteners**

- Supports 3/8" to 2" conduit.
- Unique Guide-Rite® Fastener provides for fast and easy installation with pliers.
- Available with clearance hole for 1/4" bolt or 1/4" -20 thread impression mounting hole.
- Static Load Capacity: 100 Lbs. - Vertical, 25 Lbs. - Horizontal

Catalog number	Conduit Size	Box Qty.	Patent Number
BG-6	3/8"	100	4958792
BG-8-12	1/2", 3/4"	100	
BG-16	1"	100	
BG-20	1 1/4"	100	
BG-24	1 1/2"	100	
BG-32	2"	100	
BG-6-4T	3/8"	100	4958792
BG-8-1 2-4T	1/2", 3/4"	100	
BG-16-4T	1"	100	
BG-20-4T	1 1/4"	100	
BG-24-4T	1 1/2"	100	
BG-32-4T	2"	100	


Read safety/installation instruction sheets in packages before use.




**Guide-Rite® Fastener With clearance Hole For 1/4" Bolt**



**Guide-Rite® Fastener With 1/4" 20 Thread Impression**




25 lbs



**Static Load Capacity**

100 lbs

## Rod and Wire Fasteners

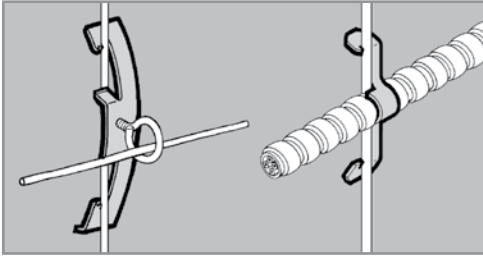

- BW2 supports #10-24 or 1/4"-20 threaded bridles rings and provides easy attachment of electrical boxes
- BW4 supports cables from #12 thru #8 wire in vertical or horizontal applications.


Catalog number	Wire Size	Flange Thickness	Box Qty.
BW2	#12 wire thru 1/4" plain rod	1/8" - 3/8"	100

Catalog Number	Description			Box Qty.
Bw4	Multi-size Wire Fastener			100
Cable Size	#12 Wire	#10 Wire	#8 & 9 Wire	
14-2 Cable	BW4	BW4	BW4	BW4
14-3 Cable	BW4	BW4	BW4	BW4
12-2 Cable	BW4	BW4	BW4	BW4
12-3 Cable	BW4	BW-8	BW-8	BW-8

Read safety/installation instruction sheets in packages before use. These products are designed for positioning only. No load rating.

Note: An independent means of support is required.

## Rod and Wire Fasteners

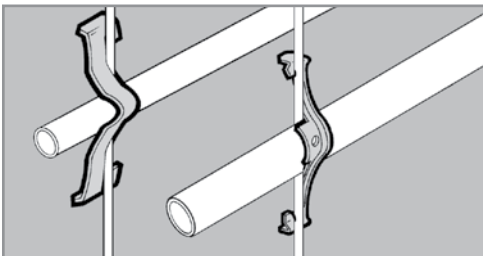


- Attaches conduit to rods or flanges
- Can be used for flexible metallic tubing, armored cable, portable cable, control cable, and communication cable.

Conduit Size	#10 & #12 Wire	#8 & 9 Wire	3/16" & 1/4" Rod	1/8" to 1/4" Flange	5/16" to 3/8" Flange	7/16" to 1/2" Flange
1/2" EMT	BW-8	BW-8	BW-8	BW-8	BW-12	BW-12
1/2" RIGID	BW-8	BW-12	BW-12	BW-12	BW-12	BW-16
3/4" EMT	BW-12	BW-12	BW-12	BW-12	BW-16	BW-16
3/4" RIGID	BW-12	BW-12	BW-16	BW-16	BW-20*	BW-20*
1" EMT	---	BW-16	BW-16	BW-16	BW-20*	BW-20*
1" RIGID	---	---	---	BW-20*	BW-20*	BW-20*
1 1/4" EMT	---	BW-20	BW-20	BW-20	---	---


\*Note: For horizontal applications only.

### Static Load Capacity

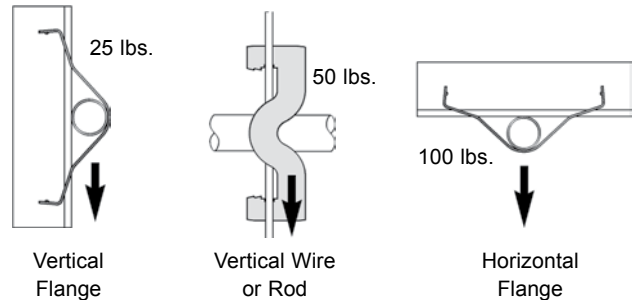

Catalog Number	Box Qty.
BW-8	100
BW-12	100
BW-16	100
BW-20	100


## Electrical Box T-Bar Fasteners

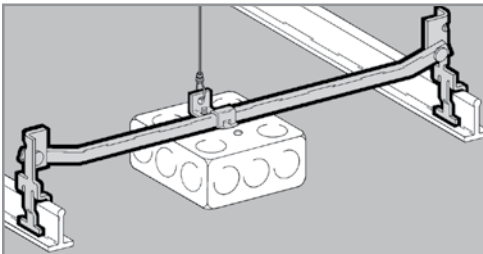

BA12

- Supports 4" octagonal or square boxes
- Allows for flush mounting or 3/4" offset for plaster ring.
- One BB27 box mounting clip with screw is included with each hanger.
- For additional support attach drop wire to BB27 Box Mounting tip.
- Warning: Do not use for hanging acoustical tee.

Catalog number	Description	Box Qty.
BA12	Box Hanger 24" Span	50
BB27	Box Mounting Clip (with Screw)	100




BA27

Box mounting clip (with screw)



**Twist Fasteners**

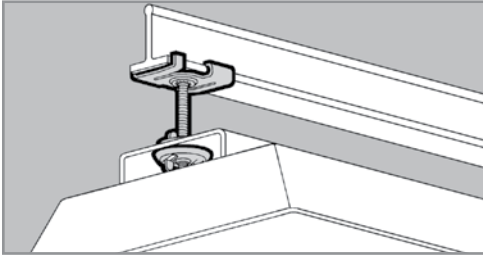

**BA-4-16-W**

Catalog Number	Finish	Stud Length	Static Load Cap.	Box Qty.
BA-4-16-W	White	5/8"	50lbs.	100
BA-4-WN	Black		100lbs.	100


Read safety/installation instruction sheets in packages before use.

- Supports electrical fixtures from 15/16" T-Bar.
- 1/4"-20 stud available in varying lengths
- BA-4-WN wing nut with 1/4" -20 thread impression included.
- No special tools required.
- Without nut add - LN, • Without stud add - LS



**BA-4-WN**

**Flange Beam Fasteners**

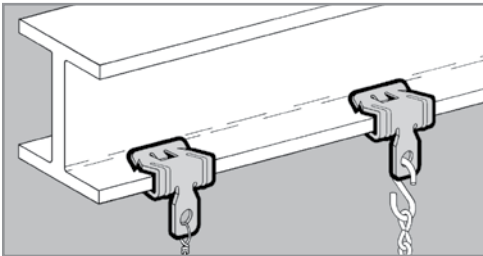


Part Number	Flange Thickness	Static Load Cap.	Box Qty.
BE-1 -2	3/32" To 9/64"	160 Lbs.	100
BE-2-4	1/8" to 1/4"	200 Lbs.	100
BE-5-8	5/16" to 1/2"	200 Lbs.	100
BE-9-12	9/16" to 3/4"	200 Lbs.	100

Read safety/installation instruction sheets in packages before use.

- Permits fast and easy installation on bulb tees and bar joists
- Clearance hole for 1/4" bolt in tab.
- Simply installed with a hammer.

**Universal Beam Fasteners**

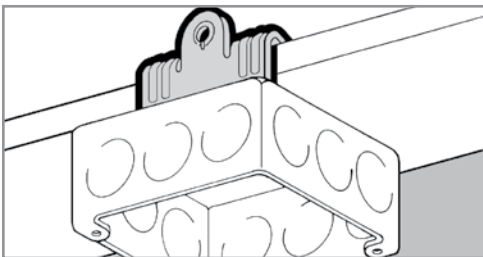


**BU-2-4**

Part Number	Flange Thickness	Box Qty.
BU-2-4	1/8" to 1/4"	100
BU-5-8	5/16" to 1/2"	100
BU-9-12	9/16" to 3/4"	100
BU-2-4-S	1/8" to 1/4"	100
BU-5-8-S	5/16" to 1/2"	100
BU-9-12-S	9/16" to 3/4"	100

Read safety/installation instruction sheets in packages before use.

- Suspend boxes or fixtures from beam flanges 1/8" to 3/4" thick.
- Provided with 1/4"-20 thread impression for quick and secure attachment.
- Simply installed with a hammer.
- Available with staked stud (1/4" - 20 x 3/8")




**BU-2-4S**


with staked stud

**Static Load Capacity**

Note: Indicated loads are static load capacity and should not be combined.

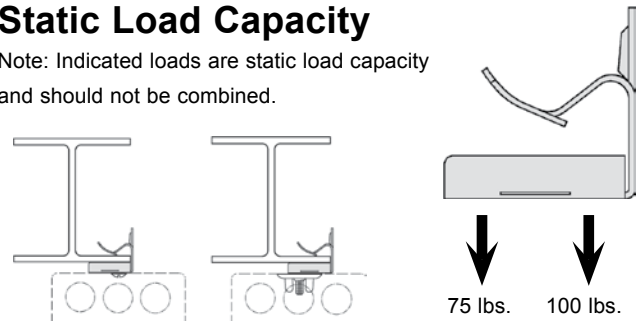


## Conduit To Beam Fasteners

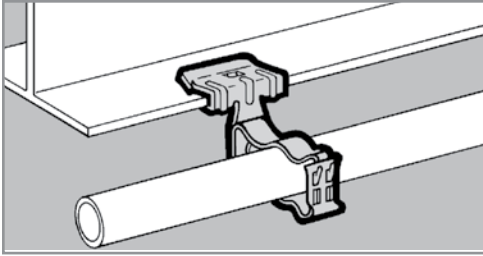

- Supports 3/8" to 2" conduit.
- Unique Guide-Rite® Fastener provides for fast and easy installation.
- Fasteners will rotate 360°.
- Simply installed with a hammer and pliers


### Static Load Capacity



25 lbs.

Part Number	Conduit Size	Flange Thickness	Box Qty.
BG-6-E-2-4	3/8"	1/8" to 1/4"	100
BG-6-E-5-8	3/8"	5/16" to 1/2"	100
BG-6-E-9-12	3/8"	9/16" to 3/4"	100
BG-8-12-E-2-4	1/2", 3/4"	1/8" to 1/4"	100
BG-8-12-E-5-8	1/2", 3/4"	5/16" to 1/2"	100
BG-8-12-E-9-12	1/2", 3/4"	9/16" to 3/4"	100
BG-16-E-2-4	1"	1/8" to 1/4"	100
BG-16-E-5-8	1"	5/16" to 1/2"	100
BG-16-E-9-12	1"	9/16" to 3/4"	50

Read safety/installation instruction sheets in packages before use.

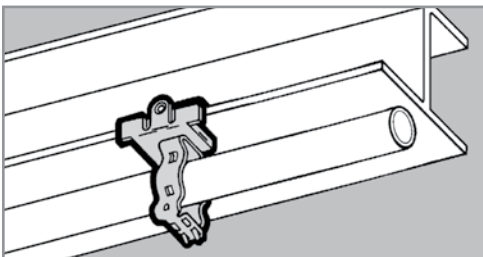

- Supports 3/8" to 2" conduit.
- Unique Guide-Rite® Fastener provides for fast and easy installation.
- Fasteners will rotate 360°.
- Simply installed with a hammer and pliers


### Static Load Capacity



75 lbs.

Part Number	Conduit Size	Flange Thickness	Box Qty.
BG-6-U-2-4	3/8"	1/8" to 1/4"	100
BG-6-U-5-8	3/8"	5/16" to 1/2"	100
BG-6-U-9-12	3/8"	9/16" to 3/4"	100
BG-8-12-U-2-4	1/2", 3/4"	1/8" to 1/4"	100
BG-8-12-U-5-8	1/2", 3/4"	5/16" to 1/2"	100
BG-8-12-U-9-12	1/2", 3/4"	9/16" to 3/4"	100
BG-16-U-2-4	1"	1/8" to 1/4"	100
BG-16-U-5-8	1"	5/16" to 1/2"	100
BG-16-U-9-12	1"	9/16" to 3/4"	50

Read safety/installation instruction sheets in packages before use.

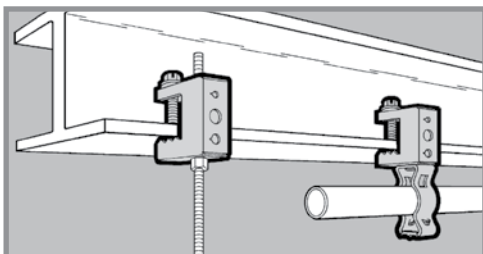

## BC1


- Fits beam flanges thru 1/2" thick.
- Accepts" S' hooks, 1/4" and 3/8" threaded rod, 1/4" -20 or #10-24 threaded bridle rings
- Supports conduit and electrical boxes

Part Number	Flange Thickness	Static Load Cap	Box Qty.
BC-1	Thru 1/2"	100 lbs.	100

Read safety/installation instruction sheets in packages before use.




**Strap Hangers**

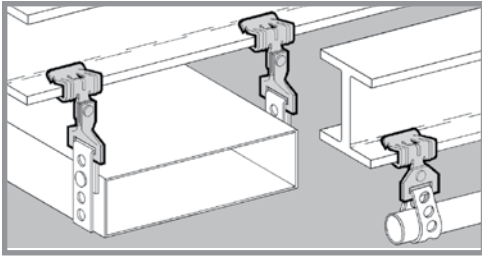

- Suspend straps thru 1" wide from beam flanges 1/8" to 3/4" thick.
- Suspend from straps parallel or at right angles to beams
- Simply installed with a hammer.
- Static Load Capacity: 200 Lbs.



**Parallel**




**Right Angle**

Part Number	Description	Flange Thickness	Box Qty.
BH-2-4	Parallel	1/8" to 1/4"	100
BH-5-8	Parallel	5/16" to 1/2"	100
BH-2-4-R	Right Angle	1/8" to 1/4"	100
BH-5-8-R	Right Angle	5/16" to 1/2"	100

Read safety/installation instruction sheets in packages before use.


**Threaded Bridle Rings**

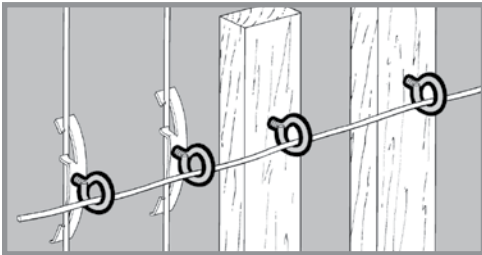


- Supports low voltage communication cables from beams or rods when used with other fasteners
- Ultimate Static Load Capacity: 50 Lb&
- Finish: Zinc Rated



**Threaded**



**Lag Screw For Wood Beams**



**Unthreaded**

Part Number	Ring Size	Thread Size	Box Qty.
BR-8-T	1/2"	#10-24	100
BR-12-T	3/4"	#10-24	100
BR-20-T	1 1/4"	#10-24	100
BR-32-T	2"	#10-24	100
BR-20-4T	1 1/4"	1/4"-20	100
BR-32-4T	2"	1/4"-20	100
BR-64-4T	4"	1/4"-20	50
BR-16-3W	1"	3/16"	100
BR-24-4W	1 1/2"	1/4"	100
BR-8	1/2"	#10-24	100
BR-12	3/4"	#10-24	100
BR-20	1 1/4"	#10-24	100
BR-32	2"	#10-24	100

Read safety/installation instruction sheets in packages before use.