


Need it Ultra Low?

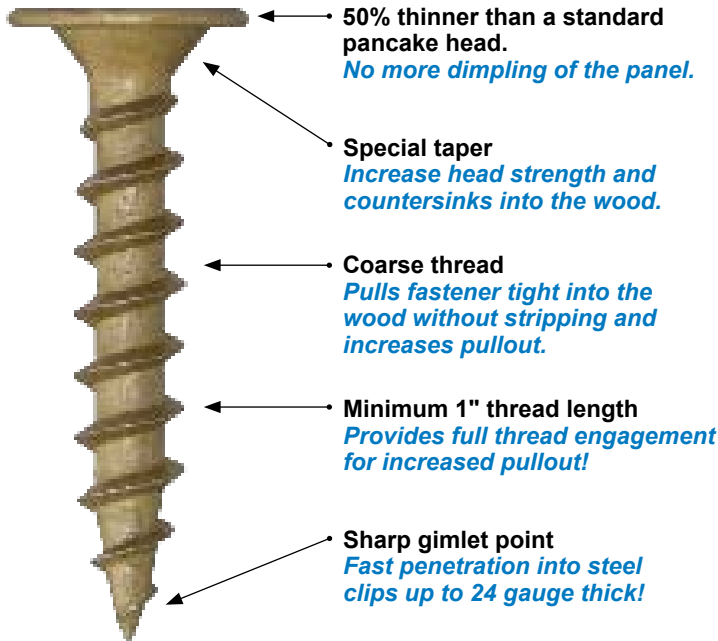

50% thinner than a standard pancake head.
No more dimpling of the panel.

Special taper
Increase head strength and countersinks into the wood.

Coarse thread
Pulls fastener tight into the wood without stripping and increases pullout.

Minimum 1" thread length
Provides full thread engagement for increased pullout!

Sharp gimlet point
Fast penetration into steel clips up to 24 gauge thick!

Now available in lengths up to 2-1/8"!


Use the original ultra low profile fastener...
CONCEALOR® ULP

The CONCEALOR® ULP is an ultra low profile screw engineered to attach standing seam roof clips to wood. They are the preferred screw for attaching clip-less metal roof panels, and are easy to install providing optimal strength. ULP's are supplied with TRI-SEAL™ 1,000-hours salt spray coating which can be used in ACQ and fire treated lumber.



24ga maximum

Bagged 250 pcs. per bag for your convenience!

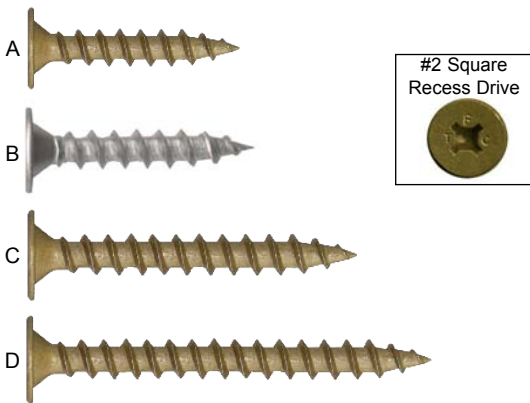

Sizes

	Description	Drilling Thickness	Part Number	Carton Quantity	WT Per M Pcs
A	#10-9 X 1-1/8" ULP (CS) Long-life TRI-SEAL™ coated	<= 24 ga.	101125CGWC	5,000 pcs	8.2#
B	#10-9 X 1-1/8" ULP (410 SS) Passivated	<= 24 ga.	101125CGWSS	5,000 pcs	8.2#
C	#10-9 X 1-5/8" ULP (CS) Long-life TRI-SEAL™ coated	<= 24 ga.	10162CGWC	5,000 pcs	11.7#
D	#10-9 X 2-1/8" ULP (CS) Long-life TRI-SEAL™ coated	<= 24 ga.	10212CGWC	5,000 pcs	15.3#

CS = Carbon Steel - C1018 / C1022
410 SS = 410 Stainless Steel

TECHNICAL INFORMATION

Description: #10-9 Gimlet Point self-tapping screw
Head Style: Ultra low pancake head with taper
Drive System: #2 square recess
Material: C1018 carbon steel
410 Stainless steel
(Copper Roofing Compatible)
Heat Treat: Case hardened to ANSI/ASME B18.6.4 specification
Finish
Carbon Steel: TRI-SEAL™ long-life coating (1,000hrs. salt spray)
Stainless Steel: Passivated (1,000hrs. salt spray)

Thread Detail

Major Diameter: .195"
Minor Diameter: .125"
Stress Area: .01267 in²

Pullout - Average Ultimate in Pounds

Fastener Dia. & Point	Wood Type						
	1/2" Plywood	5/8" Plywood	3/4" Plywood	7/16" OSB	19/32" OSB	23/32" OSB	2 x 4 SYP
#10-9 GP	383	395	574	136	356	514	813

Farabaugh Engineering Test: Project No. T279-10

Rev 040711

Fastener Strength

Torsional	60 in.- lbs.
Tensile	1,520 lbs. min.
Shear	1,150 lbs. min.

CONCEALOR® ULP is Miami-Dade Approved!

