

## #14-13 DP1 - METAL OR WOOD


*Fasten into metal or wood*



**#14 DP1 CONCEALOR®** is engineered to perform in a variety of applications. Special buttress thread form provides exceptional clamping loads and resists loosening compared to ordinary thread forms. Specified in many metal roofing systems to attached SSR clips over rigid insulation into metal deck.

**FM approved for preliminary attachment of nail base insulation without the use of stress plates.**

*Here is why we use a special thread...*

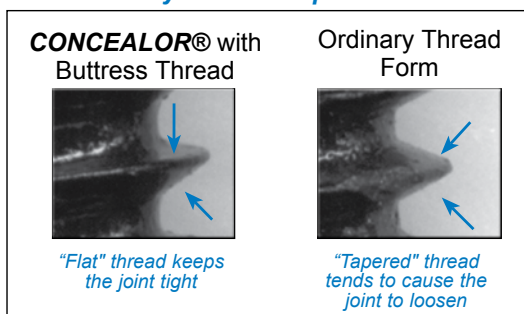

| Description         | Attachment Thickness | Part Number | Carton Quantity | Wt Per M Pcs |
|---------------------|----------------------|-------------|-----------------|--------------|
| #14-13 x 1-1/2" DP1 | <=1.000"             | 141500C1    | 2,500 pcs       | 14.0#        |
| #14-13 x 2" DP1     | <=1.500"             | 142000C1    | 1,000 pcs       | 18.0#        |
| #14-13 x 3" DP1     | .125" - 2.500"       | 143000C1    | 1,000 pcs       | 26.0#        |
| #14-13 x 4" DP1     | .125" - 3.500"       | 144000C1    | 1,000 pcs       | 29.5#        |
| #14-13 x 4-1/2" DP1 | .625" - 4.000"       | 144500C1    | 1,000 pcs       | 36.5#        |
| #14-13 x 5" DP1*    | 1.125" - 4.500"      | 145000C1    | 1,000 pcs       | 40.0#        |
| #14-13 x 6" DP1*    | 2.125" - 5.500"      | 146000C1    | 1,000 pcs       | 47.0#        |
| #14-13 x 7" DP1*    | 3.875" - 6.500"      | 147000C1    | 500 pcs         | 54.0#        |
| #14-13 x 8" DP1*    | 4.875" - 7.500"      | 148000C1    | 500 pcs         | 57.0#        |
| #14-13 x 9" DP1*    | 5.875" - 8.500"      | 149000C1    | 500 pcs         | 61.0#        |

Epoxy Coated 15 cycles Kesternich. Exceeds FM 4470

\*Longer thread length available.



**Now available in lengths up to 9"!**



## #12-24 DP4 - THICK METAL

*Fasten into metal from 14 gauge up to 1/4"*

*(For optimal strength, consider using our 1/4-14 DP3 listed on page 22.)*



**#12 DP4 CONCEALOR®** Heavy Duty fasteners can drill and tap up to 1/4" steel! Great for heavy gauge applications requiring a low profile head. Coated with an epoxy finish that exceeds FM4470 specification assuring long-life corrosion resistance.



| Description         | Attachment Thickness | Part Number | Carton Quantity | Wt Per M Pcs |
|---------------------|----------------------|-------------|-----------------|--------------|
| #12-24 x 1-3/8" DP4 | <=.375"              | 121375C35E  | 2,500 pcs       | 16#          |
| #12-24 x 2-3/4" DP4 | <=1.500"             | 122750C35E  | 1,000 pcs       | 26#          |
| #12-24 x 3-3/4" DP4 | .375" - 2.500"       | 123750C35E  | 1,000 pcs       | 34#          |
| #12-24 x 4-3/4" DP4 | 1.375" - 3.500"      | 124750C35E  | 1,000 pcs       | 40#          |
| #12-24 x 5-3/4" DP4 | 2.375" - 4.500"      | 125750C35E  | 1,000 pcs       | 48#          |
| #12-24 x 6-3/4" DP4 | 3.375" - 5.500"      | 126750C35E  | 1,000 pcs       | 54#          |
| #12-24 x 7-3/4" DP4 | 4.375" - 6.500"      | 127750C35E  | 1,000 pcs       | 62#          |

Epoxy Coated 15 cycles Kesternich. Exceeds FM 4470