




SCREWS FOR STEEL DECKING APPLICATIONS

Visit our website for the most up-to-date product and technical information!

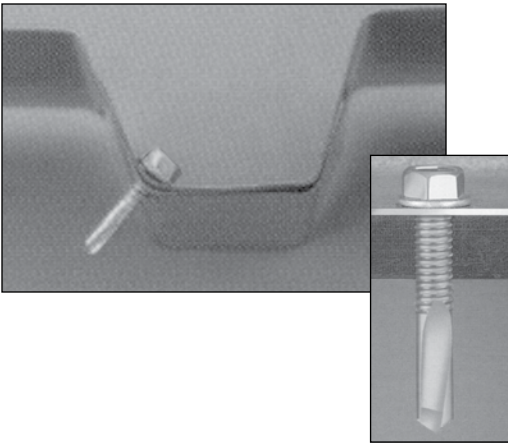

Triangle Fastener offers the most comprehensive fastener line for metal deck attachment. Special designed fasteners for side laps and structural steel up to 1/2" thick.

Our fasteners drill and tap faster and more consistently than "ordinary" self-drilling screws. Fasteners are coated to provide optimal corrosion protection, and most are ICBO approved and SDI listed!

Steel decking side laps. Special drill point for fast penetration and increased seating torque. Use a 5/16" hex nut-setter.



Description	Head Style	Drill Point	Drill Capacity	Max Material Thickness
#10-16 x 3/4"	5/16" HWH	DP3	.036" to .175"	.325"
#10-16 x 3/4"	5/16" HWH	DP1	.018" to .095"	.220"
#12-14 x 3/4"	5/16" HWH	DP1	.018" to .095"	.205"
#12-14 x 1"	5/16" HWH	DP3	.036" to .210"	.290"
1/4-14 x 7/8"	5/16" HWH	DP1	.024" to .095"	.380"

Steel decking to structural steel up to 1/2" thick. No need for pre-drilling. Use a 5/16" hex nut-setter.



Description	Head Style	Drill Point	Drill Capacity	Max Material Thickness
#12-24 x 7/8"	5/16" HWH	DP4	.125" to .250"	.325"
#12-24 x 1-1/4"	5/16" HWH	DP4	.125" to .250"	.575"
#12-24 x 1-1/4"	5/16" HWH	DP5	.250" to .500"	.375"
1/4-14 x 1"	5/16" HWH	DP3LP	.036" to .250"	.250"

Corrosion Resistance

Fasteners are ClimaSeal long-life coated for optimal corrosion protection!

Salt Spray (ASTM B117) :720 hrs - 10% or less red rust

Kesternich (DIN 50018, 2.0L): 25 cycles - 10% or less red rust

Approvals & Listings

Most fasteners are available with the following approvals and listings

Factory Mutual: J.I.1. x 9A2.AM & J.I.1 x 7A2AM

ICBO: 3056 & ER4254

City of L.A. Approval

Steel Deck Institute Listed

For technical information, please refer the BLAZER® Drill Screws pages 16 & 17.

