

SIZES

**The fasteners are designed for use in Ramset Single Shot Gas Tools (R150, T3SS)
Selection Chart**

THREADED ROD HANGER For suspended ceilings, piping and other items using 1/4 or 3/8 threaded rod

FASTENER IS PREASSEMBLED TO AN 16 GAGE THREADED ROD HANGER. 100 PER JAR.



PART NUMBER	DESCRIPTION	M150	E150/ T150	R150	T3SS
14TRHMP034	1/4" Rod hanger with 3/4" plated pin	■	■	■	■
38TRHMP034	3/8" Rod hanger with 3/4" plated pin	■	■	■	■

Shank diameter = .104/.125
Head diameter = .300

ONE HOLE STRAP Used to attach conduit or armored cable to concrete

FASTENER PREASSEMBLED TO A 16 GAGE CONDUIT STRAP. 100 PER JAR, 3/8" 200 PER JAR AND 1-1/4" 25 PER JAR.



PART NUMBER	DESCRIPTION	M150	E150/ T150	R150	T3SS
38HSMP034*	3/8" Hole strap with 3/4" plated pin	■	■	■	■
12HSMP034	1/2" Hole strap with 3/4" plated pin	■	■	■	■
34HSMP034	3/4" Hole strap with 3/4" plated pin	■	■	■	■
10HSMP034	1" Hole strap with 3/4" plated pin	■	■	■	■
114HSMP034**	1-1/4" Hole strap with 1" plated pin	■	■	■	■

Shank diameter = .104/.125 *38HSMP034 = 18 gage, 200 per Jar
Head diameter = .300 **114HSMP034 = 13 gage, 25 per Jar

CONDUIT CLAMP Used to attach conduit to concrete

PIN PREASSEMBLED TO AN 18 GAGE CONDUIT CLAMP. 1/2" 50 PER JAR AND 3/4" 25 PER JAR.



PART NUMBER	DESCRIPTION	M150	E150/ T150	R150	T3SS
12CCMP034L	1/2" Conduit clamp with 3/4" plated pin	■	■	■	■
34CCMP034L	3/4" Conduit clamp with 3/4" plated pin	■	■	■	■

Shank diameter = .104/.125
Head diameter = .300

CEILING CLIP ASSEMBLY Preassembled Ceiling Clip

PLATED 14 GAGE CLIP. 100 PER JAR.



PART NUMBER	DESCRIPTION	M150	E150/ T150	R150	T3SS
34CLIP	3/4"	■	■	■	■

Shank diameter = .104/.125
Head diameter = .300

TIE STRAP HOLDER Used to install temporary lighting and secure low voltage cable to concrete, uses a standard cable tie up to 3/8" in width


FASTENER PREASSEMBLED TO AN 22 GAGE TIE STRAP HOLDER. 50 PER JAR.



PART NUMBER	DESCRIPTION	M150	E150/ T150	R150	T3SS
TSHMP034	Tie strap holder with 3/4" plated pin	■	■	■	■

Shank diameter = .104/.125 Head diameter = .300

Threaded Studs




- For applications that require removability, where shimming is required.

Selection Chart

Part Number	Thread Length In. (mm)	Shank Length In. (mm)								
			721	Auto Fast	D60	SA270	D45/ *D45A	Cobra	M70	Viper
1623WK	3/4 (19.1)	1/2 knurled (12.7)	☞	☞	☞	☞	☞	☞	☞	☞
1642W	1/2 (12.7)	1 (25.4)	☞	☞	☞	☞	☞	☞	☞	☞
1643W	3/4 (19.1)	1 (25.4)	☞	☞	☞	☞	☞	☞	☞	☞
1644W	1 (25.4)	1 (25.4)	☞	☞	☞	☞	☞	☞	☞	☞
1653W	3/4 (19.1)	1 1/4 (31.8)	☞	☞	☞	☞	☞	☞	☞	☞

Shank diameter = .145

3/8"-16 Threaded Stud




Selection Chart

Part Number	Thread Length In. (mm)	Shank Length In. (mm)	MD380
9140K	1 (25.4)	5/8 knurled (15.9)	☞
9150	1 (25.4)	1 1/16 (27.0)	☞
9190	1 (25.4)	1 1/4 (31.8)	☞

Shank diameter = .205

Ceiling Clip Assemblies

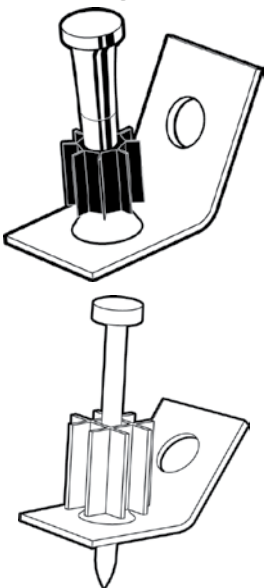

- .300 head diameter pin.
- Fastener is preassembled to 14 gauge angle clip for applications such as the hanging of ceiling wire to support ceiling grid.
- Available in 1000 pack only.

Selection Chart

Part Number	Description						
		721	Auto Fast	D60	SA270	D45/ D45A	Viper*
2202	Ceiling Clip w/1 1/4"	☞	☞	☞	☞	☞	☞

* Viper tool comes assembled with the 2VP4125 nosepiece.

Shank diameter = .145

Selection Chart


Part Number	Pin Length In. (mm)							
		721	Auto Fast	D60	SA270	D45/ D45A	Cobra	Viper
SDC100	1 (25.4)	☞	☞	☞	☞	☞	☞	☞
SDC125*	1 1/4 (31.8)	☞	☞	☞	☞	☞	☞	☞

* Available in 100-Pack
Shank diameter = .145



PowerPoint Pins with Ceiling Clip

- .300 head diameter pin for hard concrete.



Selection Chart


Part Number	Pin Length In. (mm)	Auto Fast	D60	SA270	D45/D45A	Cobra	Viper
SPC78	7/8 (22.2)	☑	☑	☑	☑	☑	☑
SPC114	1 1/4 (31.8)	☑	☑	☑	☑	☑	☑

SPC78 shank diameter = .150
 SPC114 shank diameter = .150/.180

Conduit Clip Assemblies

.300 Head Diameter Pin

- Fastener is preassembled to conduit clip to attach electrical conduit to concrete or steel.



Selection Chart

Part Number	Description	721	Auto Fast	D60	SA270	D45/D45A	Cobra	M70	Viper
38BXSP78C	3/8" bx clip with 7/8" pin	☑	☑	☑	☑	☑	☑	☑	☑
12EMTSP78C	1/2" conduit clip with 7/8" pin	☑	☑	☑	☑	☑	☑	☑	☑
34EMTSP78C	3/4" conduit clip with 7/8" pin	☑	☑	☑	☑	☑	☑	☑	☑

Shank diameter = .150

Fastener Angle Clip

Selection Chart



Part Number	Description
1202CF	Angle clip (no pin)

Ladd Assembly for L1600



Selection Chart

Part Number	Pin Length In. (mm)	Description
L652	1 1/4 (31.8)	Preassembled pin & clip

Shank diameter = .152