


**HEX WASHER HEAD**

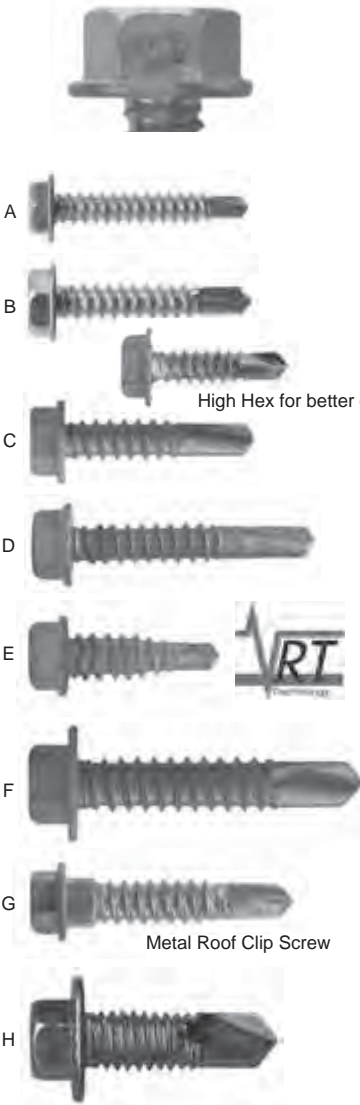

**HEX DRIVE SIZE**  
#8 dia: 1/4" HWH  
#10 dia: 5/16" HWH  
#12 dia: 5/16" HWH  
1/4 dia: 3/8" HWH  
5/16 dia: 3/8" HWH

High Hex for better driving stability!

Metal Roof Clip Screw

**Heavy Gauge Applications - DP4 & DP5 Points**

- Drill and tap up to 1/2" thick steel.
- Supplied with our TRI-SEAL™ long life coating for superior corrosion protection.
- Lengths up to 8" for retrofit metal roof base attachment.



- ▶ The hex washer head is the most popular drive system and provides the best stability during installation.
- ▶ Available with TRI-SEAL™ long life coating for the ultimate corrosion protection...1,000 hrs salt spray with no red rust!

**SIZES AND PERFORMANCE SPECIFICATIONS**

Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity	
A	#8-18 x 1/2"	DP2	.036" - .100"	.205"	10M
	#8-18 x 5/8"	DP2	.036" - .100"	.330"	10M
	#8-18 x 3/4"	DP2	.036" - .100"	.455"	10M
	#8-18 x 1"	DP2	.036" - .100"	.705"	7.5M
	#8-18 x 1-1/4"	DP2	.036" - .100"	1.000"	5M
	#8-18 x 1-1/2"	DP2	.036" - .100"	1.205"	5M
B	#8-18 x 2"	DP2	.036" - .100"	1.750"	1.5M
	#10-16 x 1/2"	DP3	.036" - .175"	.150"	10M
	#10-16 x 5/8"	DP3 (HH)	.036" - .175"	.200"	10M
	#10-16 x 3/4"	DP3 (HH)	.036" - .175"	.325"	7.5M
	#10-16 x 1"	DP3	.036" - .175"	.575"	5M
	#10-16 x 1-1/2"	DP3	.036" - .175"	1.075"	3M
C	#10-16 x 2"	DP3	.036" - .175"	1.500"	2M
	#10-16 x 3"	DP3	.036" - .175"	2.500"	1M

"HH" Denotes High Hex

**MATERIAL:** C1018-1022 Carbon Steel


**PLATING:** Standard: .0003" Min. Electro Zinc (46hrs Salt Spray - ASTM B117)  
Meets ASTM C 1513-04 and AISI TS-4-02 Standards

Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity	
D	#12-14 x 3/4"	DP3	.036" - .210"	.290"	5M
	#12-14 x 1"	DP3	.036" - .210"	.525"	3.5M
	#12-14 x 1-1/4"	DP3	.036" - .210"	.750"	3M
	#12-14 x 1-1/2"	DP3	.036" - .210"	1.000"	2M
	#12-14 x 2"	DP3	.036" - .210"	1.500"	2M
	#12-14 x 2-1/2"	DP3	.036" - .210"	2.000"	1M
E	#12-14 x 3"	DP3	.036" - .210"	2.500"	1M
	#12-14 x 1-1/4"	DP2 LP	.036" - .200"	.750"	3.5M
F	1/4-14 x 7/8"	DP1 W/VRT	.036" - .090"	.325"	2.5M
	1/4-14 x 3/4"	DP3	.036" - .250"	.210"	2.5M
	1/4-14 x 1"	DP3	.036" - .250"	.460"	2.5M
	1/4-14 x 1-1/4"	DP3	.036" - .250"	.710"	2M
	1/4-14 x 1-1/2"	DP3	.036" - .250"	.960"	2M
	1/4-14 x 2"	DP3	.036" - .250"	1.460"	1.5M
	1/4-14 x 2-1/2"	DP3	.036" - .250"	2.460"	1M
	1/4-14 x 4"	DP3	.036" - .250"	3.460"	500
	1/4-14 x 5"	DP3	.036" - .250"	4.460"	500
	1/4-14 x 6"	DP3	.036" - .250"	5.460"	250
G	1/4-14 x 8"	DP3	.036" - .250"	7.460"	250
	#12-14 x 1-1/4"	DP2 SHLDR	.036" - .200"	.750"	3.5M
H	5/16-18 x 1"	DP3	.100" - .250"	.460"	1.5M
	5/16-18 x 1-1/4"	DP3	.100" - .250"	.710"	1.5M
	5/16-18 x 1-1/2"	DP3	.100" - .250"	.960"	1.5M
I	1/4-20 x 1-1/2"	DP5	.250" - .500"	.500"	2M
	1/4-20 x 2-1/4"	DP5	.250" - .500"	1.250"	1M
	1/4-20 x 3"	DP5	.250" - .500"	2.000"	500
	1/4-20 x 4"	DP5	.250" - .500"	3.000"	250
	1/4-20 x 5"	DP5	.250" - .500"	4.000"	250
	1/4-20 x 6"	DP5	.250" - .500"	5.000"	250
	1/4-20 x 8"	DP5	.250" - .500"	7.000"	150
J	#12-24 x 7/8"	DP4	.125" - .137"	.325"	5M
	#12-24 x 1-1/4"	DP4	.125" - .137"	.375"	3.5M
K	#12-24 x 1-1/4"	DP5	.250" - .500"	.375"	3.5M
	#12-24 x 1-1/2"	DP5	.250" - .500"	.625"	2.5M
	#12-24 x 2"	DP5	.250" - .500"	1.125"	2M

**MATERIAL:** C1018-1022 Carbon Steel

**PLATING:** Long-Life: TRI-SEAL™ Coating (1,000hrs Salt Spray - ASTM B117)  
Meets ASTM C 1513-04 and AISI TS-4-02 Standards

**PAN FRAMER - ROUND WASHER - PAN HEAD**

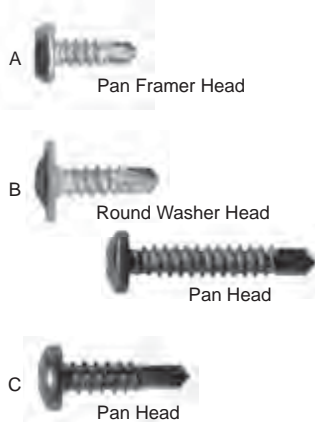

#2 Cross  
Recess Drive

- ▶ General framing applications
- ▶ Cross recess (Phillips) drive.


**SIZES AND PERFORMANCE SPECIFICATIONS**

Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
A #7-16 x 3/4"	DP2	.036" - .100"	.375"	10M
#8-18 x 1/2"	DP2	.036" - .100"	.205"	10M
#8-18 x 5/8"	DP2	.036" - .100"	.330"	10M
#8-18 x 3/4"	DP2	.036" - .100"	.455"	10M
B #8-18 x 1"	DP2	.036" - .100"	.705"	7.5M
#8-18 x 1-1/4"	DP2	.036" - .100"	1.000"	5M
#8-18 x 1-1/2"	DP2	.036" - .100"	1.205"	5M
#8-18 x 2"	DP2	.036" - .100"	1.750"	1.5M
#10-16 x 1/2"	DP3	.036" - .175"	.150"	10M
#10-16 x 5/8"	DP3	.036" - .175"	.200"	10M
#10-16 x 3/4"	DP3	.036" - .175"	.325"	7.5M
C #10-16 x 1"	DP3	.036" - .175"	.575"	5M
#10-16 x 1-1/4"	DP3	.036" - .175"	.825"	3.5M
#10-16 x 1-1/2"	DP3	.036" - .175"	1.075"	3M

**MATERIAL:** C1018-1022 Carbon Steel

**PLATING:** .0002" Min. Electro Zinc (24hrs Salt Spray)

**PANCAKE HEAD SCREWS**



#2 Square  
Drive Power Bit

- ▶ Pancake head provides extra clearance compared to round washer head fasteners.
- ▶ #2 Square/cross recess for exceptional driving stability...NO CAM-OUT!

**SIZES AND PERFORMANCE SPECIFICATIONS**


Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
D #10-16 x 5/8"	DP3	.036" - .175"	.200"	10M
E #10-24 x 5/8"	DP3	.036" - .175"	.200"	10M

**MATERIAL:** C1018 - 1022 Carbon Steel

**PLATING:** .0003" Min. Electro Zinc with yellow di-chromate (48hrs Salt Spray)

**LONG PILOT AND STRESS-LESS FEATURE**

Long-pilot Point

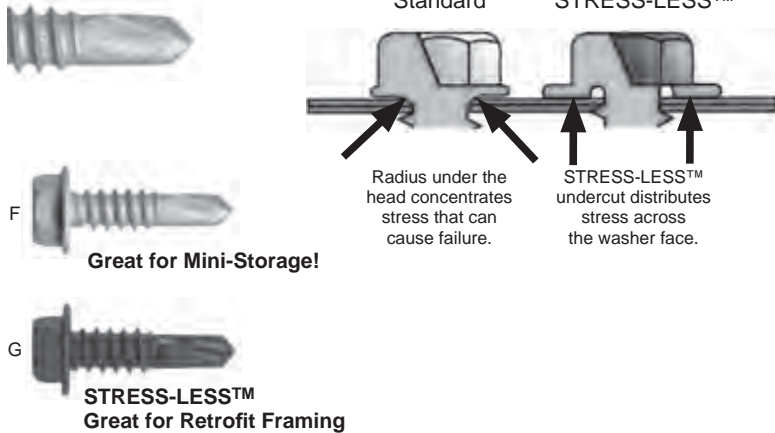

- ▶ Great for steel framing when multiple thicknesses are used.
- ▶ STRESS-LESS™ undercut head is designed to eliminate stress that concentrates under the head of fasteners.

**SIZES AND PERFORMANCE SPECIFICATIONS**

Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity
F #12-14 x 7/8"	DP3	.036" - .210"	.325"	2.5M
G 1/4-14 x 7/8"	DP3	.036" - .250"	.325"	2.5M

**MATERIAL:** C1018-1022 Carbon Steel

**PLATING:** .0003" Min. Zinc w/TRI-SEAL™ Coating (1,000hrs Salt Spray)

**HEAD TYPE**

#12 dia: 5/16" HWH

1/4 dia: 5/16" HWH