


# High Performance Closures for Metal Roofing

**CLOSE-TITE**<sup>TM</sup>  
METAL PANEL CLOSURE



**VENT-TITE**<sup>TM</sup>  
ROOF VENTING CLOSURE

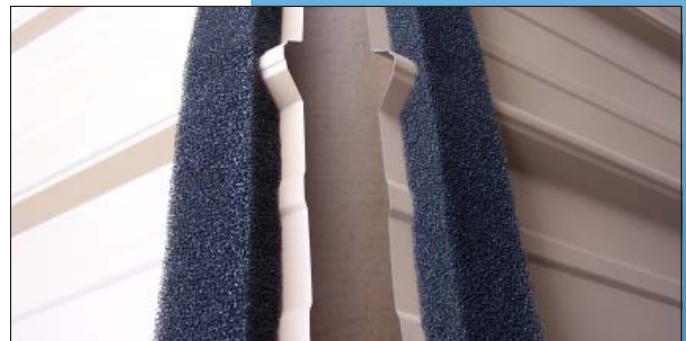

“Specialty Fasteners, Tools, Sealants and Services for the  
Commercial Construction Industry”  
(800) 486-1832 / [www.trianglefastener.com](http://www.trianglefastener.com)

# CLOSE-TITE™ METAL PANEL CLOSURE




CLOSE-TITE™ high performance closure is formulated from special polyethylene material that is designed to be UV resistant and minimize shrinkage.

- 100% recyclable material that meets the GREEN Building Requirements.
- UV resistant and resists shrinkage.
- Cut to the panel profile for an exact fit.
- Many, many profiles available!
- Adhesive and dovetailed ends available.

## Performance and Physical Properties



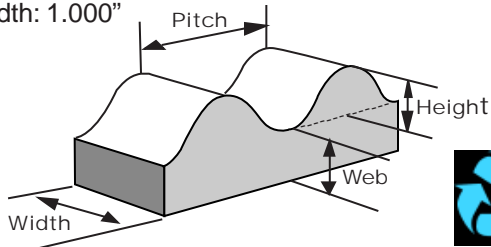




Material: Polyethylene Foam with UV protection.  
100% recyclable  
Color: Grey  
Characteristics: Excellent weathering,  
UV resistant, minimal shrinkage, recyclable.  
Width: 1.000"



Properties	Test Method	Results
Density	ASTM D 3575	2.0 lbs/ft <sup>2</sup>
Linear Shrinkage	Linear shrinkage after 3hrs @ 158°	<5%
Compression set	ASTM D 3575	7.7 psi
Tensile Strength	ASTM D 3575	40.0 psi
Elongation	ASTM D 3575	49%
Compression set	ASTM D 1667 @ 25% deflection	-----
Water Absorption	ASTM D 3575 (L)	06lbs/ft <sup>2</sup>
Tear Resistance	ASTM D 3575 (G)	3.3 lbs/in
UV Resistance	ASTM G 53	3000hrs.
UV Package		Yes
Service Temperature (Max)	180°	

100% Recyclable Material!


## Stock Profiles

		<u>Type</u>	<u>Pitch</u>	<u>Rib Height</u>	<u>Closure Length</u>	<u>Qty./ Box</u>
		2.67 Corrugated	2.67"	9/16"	36"	100pcs. (300')
		<u>Type</u>	<u>Pitch</u>	<u>Rib Height</u>	<u>Closure Length</u>	<u>Qty./ Box</u>
		2.67 Corrugated	2.67"	7/8"	36"	100pcs. (300')
	Outside Inside	<u>Type</u>	<u>Pitch</u>	<u>Rib Height</u>	<u>Closure Length</u>	<u>Qty./ Box</u>
		5 V CRIMP	12"	1-3/16"	36"	100pcs. (300')
	Outside Inside	<u>Type</u>	<u>Pitch</u>	<u>Rib Height</u>	<u>Closure Length</u>	<u>Qty./ Box</u>
		U PANEL	6"	3/4"	36"	100pcs. (300')
	Outside Inside	<u>Type</u>	<u>Pitch</u>	<u>Rib Height</u>	<u>Closure Length</u>	<u>Qty./ Box</u>
		MULTIRIB	12"	1-3/16"	36"	100pcs. (300')
	Outside Inside	<u>Type</u>	<u>Pitch</u>	<u>Rib Height</u>	<u>Closure Length</u>	<u>Qty./ Box</u>
		R PANEL	12"	1-1/4"	36"	100pcs. (300')
	Outside Inside	<u>Type</u>	<u>Pitch</u>	<u>Rib Height</u>	<u>Closure Length</u>	<u>Qty./ Box</u>
		APANEL	12"	1-1/8"	36"	100pcs. (300')

Many other profiles available. Call for details.

# VENT-TITE™

## ROOF VENTING CLOSURE

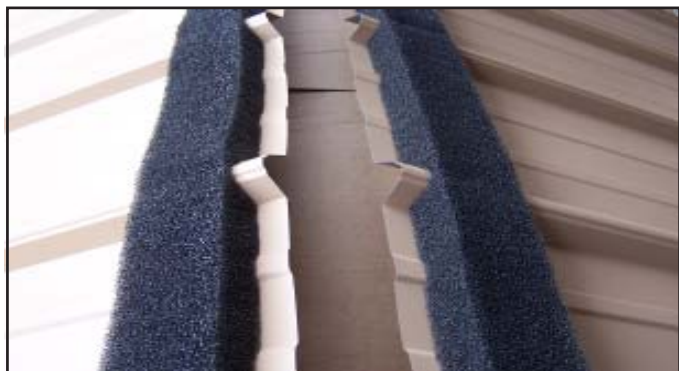

VENT-TITE™ high performance venting closure provides as much air flow as 1-power vent, 3-turbines or 7-roof louvers!

- UV resistant and resists shrinkage.
- Cut to the panel profile for an exact fit.
- Easy to install!
- Many, many profiles available!
- Adhesive and dovetailed ends available.

**50 lineal feet of VENT-TITE™  
moves as much air as...**

One  
1,120 CFM  
Power Vent



Three  
Turbine  
Vents



Seven  
Roof Louvers  
(315 sq. in.)




## Performance and Physical Properties

Material: Open cell, reticulated urethane foam.

Color: Black

Characteristics: Excellent weathering, UV resistant, minimal shrinkage.

Width: 1.000"

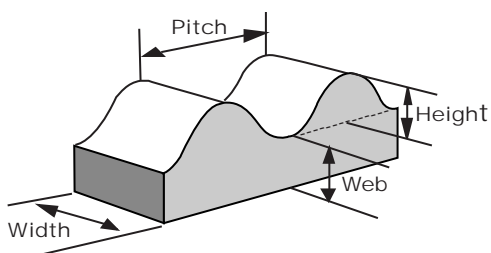

Properties	Test Method	Results
Air Permeability	ASTM D 737	>760 cu.ft./mi
100mph Wind Drive Rain	CLR 6875	No Leakage
Cold Crack	F87260 sec.4-C14	<5%
Snow Infiltration	CLR 5704	0
Tensile Strength		16 psi
Elongation		175%
Compression Set		7%
Tear Strength	ASTM D 3574	3.50%
Abrasion	ASTM D 1175	No Damage to panel surface

## Stock Profiles

Outside Inside	Type	Pitch	Rib Height	Closure Length	Qty./ Box
	5 V CRIMP	12"	1-3/16"	36"	50pcs. (150')
	MULTIRIB	12"	1-3/16"	36"	100pcs. (300')
	R PANEL	12"	1-1/4"	36"	50pcs. (150')

Many other profiles available. Call for details.

# Professional Grade Products for the Commercial Construction Industry



## Who we are...

Since 1977, Triangle Fastener Corporation has supplied the construction industry with the most comprehensive lines of standard and specialty fastening systems solutions. We are committed to offering the latest fastening systems technologies that provide high performance and low in-place costs. We offer local inventories and services that meet your performance and quality demands. Our “hands-on” approach to servicing your needs guarantees that you get the attention you deserve.



- Standard and specialty fasteners!
- Power tool and hand tools!
- Sealants, paint and tapes!
- Safety equipment and misc. contractor supplies!
- Job-site support!
- Product development!



“Specialty Fasteners, Tools, Accessories and Services for the Commercial Construction Industry”

(800) 486-1832 / [www.trianglefastener.com](http://www.trianglefastener.com)