


The largest selection for the construction industry!

### BOND-SEAL SEALING WASHER



- The BOND-SEALER™ sealing washer is EPDM vulcanized to a 20 Gauge galvanized backing.
- TRI-SEAL® long life coated for superior corrosion protection.

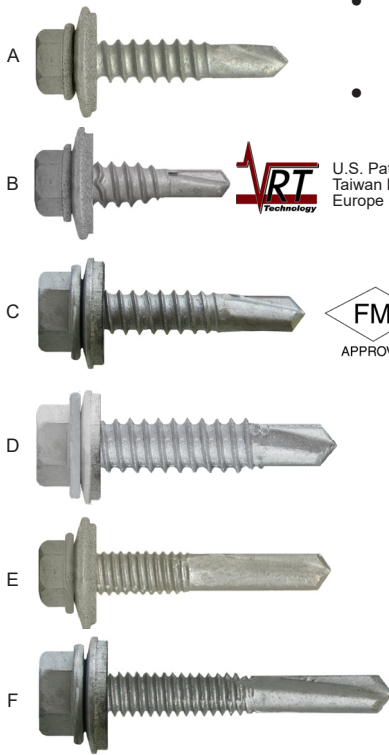

U.S. Pat. No. 8,360,701  
Taiwan Pat No. I50140  
Europe Pat No. 2286067




**HEAD TYPE**  
#12 dia: 5/16" HWH  
1/4" Dia: 3/8" HWH  
\*1/4 dia: 5/16" & 3/8"HWH  
5/16 dia: 3/8" HWH

**WASHER DETAILS**  
20 ga G-90 Galvanized Steel  
Vulcanized to .062" thick non-conductive EPDM  
15MM OD Washer

Special sizes available upon request.

### FLANGE-SEAL HEAD with EPDM WASHER

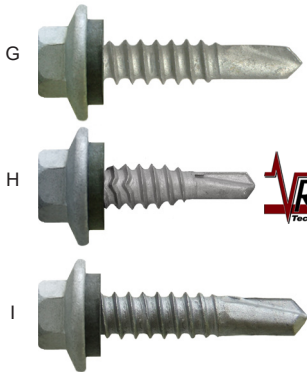

- FLANGE-SEAL™ self-sealing fastener has a deep undercut head that entraps the EPDM sealing washer to assure a leak free seal.
- TRI-SEAL® long-life coated for superior corrosion protection.



**WASHER DETAILS**  
.125" Thick EPDM  
Non-conductive

**HEAD TYPE**  
5/16" HWH with Flange Undercut

SCREW AND POINT	DRILL AND TAP CAPACITIES						
	.036"	.100"	.175"	.210"	.250"	.375"	.500"
#8-18 BLAZER-2							
#10-16 BLAZER-3							
#12-14 BLAZER-3							
#12-24 BLAZER-4							
#12-24 BLAZER-5							
1/4-14 BLAZER-1 VRT							
5/16-12 BLAZER-3							
1/4-14 BLAZER-3							
1/4-20 BLAZER-5							

**MATERIAL:** C1018-1022 Carbon Steel  
**PLATING:** TRI-SEAL® Coating (1,000hrs Salt Spray - ASTM B117).  
Exceeds ASTM B633 and F1941 Standards  
**Dimensions:** Meets or exceeds SAE J78 Standards

Blue colored sizes denotes popular DC items


### SIZES AND PERFORMANCE SPECIFICATIONS

DIAMETER AND POINT		LENGTH	Load Bearing Length (Max)	Box Qty	LIST PRICE
A	#12-14 BLAZER-2	x	3/4"	.125"	5M
			1"	.250"	3.5M
			1-1/4"	.625"	3M
			1-1/2"	.750"	2M
			2"	1.25"	2M
			2-1/2"	1.75"	1M
			3"	2.25"	1M
B	1/4-14 BLAZER-1 VRT	x	*7/8" VRT	.325"	2.5M
C	1/4-14 BLAZER-3	x	3/4"	.125"	2.5M
			*1"	.250"	2.5M
			*1-1/4"	.625"	2M
			1-1/2"	.875"	2M
			2"	1"	1.5M
			2-1/2"	1.50"	1M
			3"	2"	1M
			4"	3"	500
			5"	4"	500
			6"	2" - 5"	250
			8"	4" - 7"	250
10"	6" - 9"	250			
D	5/16-12 BLAZER-3	x	1"	.250"	1.5M
			1-1/2"	.875"	1M
			3"	2.25"	750
			4"	3.25"	500
			6"	2.50 - 5"	500
			8"	4.25" - 7"	200
E	#12-24 BLAZER-5	x	1-1/4"	.500"	3M
			1-1/2"	.625"	2M
			2"	.750"	3M
F	1/4-20 BLAZER-5	x	1-1/2"	.500"	2M
			2-1/4"	1.250"	1M
			3-1/8"	2-1/8"	1M
			4"	3"	250
			5"	4"	250
			6"	2.50" - 5"	250
			8"	4.25" - 7"	150


### FLANGE-SEAL HEAD

G	#12-14 BLAZER-3	x	1"	.250"	3.5M
			1-1/4"	.625"	3M
			1-1/2"	.750"	2M
			2"	1.250"	2M
			2-1/2"	1.5"	1.5M
			3"	2.25"	1M
			4"	3.25"	500
H	1/4-14 BLAZER-1 VRT	x	7/8" VRT	.325"	2.5M
I	1/4-14 BLAZER-3	x	1"	.250"	2.5M
			1-1/4"	.625"	2.5M
			1-1/2"	.875"	2M
			2"	1"	1.5M


### Proper Fastener Installation



**CORRECT**  
Slight circle of sealant extrudes to outer edge.



**TOO TIGHT!**  
Metal backing begins to turn up.



**TOO LOOSE**  
Sealant is not compressed and can not form a seal.

To assure a proper seal, torque the fastener until the EPDM sealant extrudes to the outer edge of the backing material.