


BLAZER® ENGINEERING DATA




The following information is compiled to assist the design professional in selecting the appropriate fastener for the application. This data is compiled from fastener standards and independent tests. An engineering professional should be consulted to determine expected loads on the connection, environmental effects, and any other conditions that could effect the performance of the fastener. Selecting a fastener is the responsibility of the engineer and changes to a fastener should not be made without approval. Using the wrong fastener can lead to failure.

TFC WILL NOT WARRANTY, EITHER EXPRESSED OR IMPLIED, THE USE OF THIS INFORMATION.

TECHNICAL DATA




BLAZER® self-drilling fasteners are produced and perform to SAEJ78, ASME B18.6.4 and AISI TS-4-02 specifications. Conforms to ICCES AC118 acceptance criteria for tapping screw fasteners.

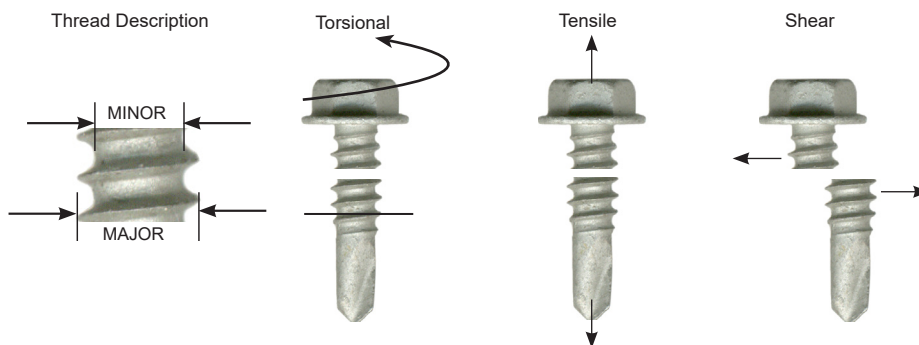

Physical Properties

Fastener Diameter	Nominal Screw Diameter	Major Diameter (inch)		Minor Diameter (inch)		Area Of Minor Dia. (sq in.)	Torsional (Lb-In.)	Tensile (Pounds)	Shear (Pounds)
		Max	Min	Max	Min				
#6-20	0.138	0.139	0.135	0.104	0.099	0.0077	24	1,125	750
#8-18	0.164	0.166	0.161	0.122	0.116	0.0106	42	1,575	1,000
#10-16	0.190	0.189	0.183	0.141	0.135	0.0143	61	2,100	1,400
#10-24	0.190	0.190	0.182	0.144	0.137	0.0147	65	3,400	2,275
#12-14	0.216	0.215	0.209	0.164	0.157	0.0194	92	2,778	2,000
#12-24	0.216	0.216	0.209	0.189	0.185	0.0269	100	3,188	2,100
1/4-14	0.250	0.246	0.240	0.192	0.185	0.0269	150	3,850	2,600
1/4-20	0.250	0.250	0.242	0.218	0.214	0.0360	156	4,275	2,700
#18-9	0.306	0.306	0.300	0.217	0.209	0.0343	196	4,550	2,576
5/16-12	0.313	0.315	0.306	0.244	0.236	0.0702	290	5,439	3,264

Material: C1018-C1022 / 410 SS
 Heat Treatment: Case Harden
 Case Hardness: 52-58 Rockwell C
 Case Depth:
 #6 Dia = .002" - .007"
 #8, #10, #12 Dia = .004" - .009"
 1/4" = .005" - .011"
Core Hardness
 Carbon Steel: 32-40 Rockwell C
 410 Stainless: 42-48 Rockwell C
 Ductility: 5 Degree minimum bend



English to Metric	Formula to Use
Decimal to Millimeters	Decimal x 25.4
PSI to Newton / Millimeters ²	PSI x .007
Pounds Force to Newtons	Pounds Force x 4.448


Gauge Thickness	Decimal	Metric
29 GA	.013"	.33mm
28 GA	.015"	.38mm
26 GA	.018"	.46mm
24 GA	.024"	.61mm
22 GA	.030"	.76mm
20 GA	.036"	.91mm
18 GA	.048"	1.22mm
16 GA	.060"	1.52mm
14 GA	.075"	1.91mm
12 GA	.105"	2.67mm
1/8"	.125"	3.18mm
10 GA	.135"	3.43mm
1/4"	.250"	6.35mm
5/16"	.312"	7.92mm
3/8"	.375"	9.53mm
1/2"	.500"	12.7mm

DISCLAIMER: ALL TEST RESULTS AND SPECIFICATIONS ARE A RESULT OF LABORATORY TESTS. APPROPRIATE SAFETY FACTORS SHOULD BE USED BY THE USER OR SPECIFIER. DETERMINING THE PROPER FASTENER IS THE RESPONSIBILITY OF THE USER OR SPECIFIER. SINCE APPLICATION CONDITIONS VARY AND ARE UNCONTROLLABLE BY TFC, WE ASSUME NO LIABILITY FOR THE USE OF THIS INFORMATION.

PULLOVER TEST RESULTS

These pullover results are for self-sealing fasteners listed in this catalog.

Pounds - Ultimate Average



Note: Estimated pullover for fasteners without sealing washers can be calculated using the following formula per AISI.

Pullover force = 1.5 -x- Thickness of the member in contact with the screw head. -x- Larger of the screw head diameter or washer diameter. -x- Tensile strength of the member in contact with the screw head.

Steel Thickness	BOND-SEALER		FLANGE SEALER	ZINC CAP HEAD	STAINLESS CAP HEAD
	12.7MM OD	15MM OD			
22 ga	945	1,249	1,298	1,647	1,298
24 ga	704	1,056	1,102	1,310	1,102
26 ga	519	654	692	794	692