

# PANEL-TITE®

METAL-TO-WOOD SCREWS



## Choose from the largest selection of fasteners for metal-to-wood applications

Designed for fast installation and corrosion free performance. All fasteners can be painted with our Kalida-Kote paint finish to your exact color match. Polyurethane with UV protection provides a chip resistant finish without chalking and fading.

### PANEL-TITE HIGH-LOW 10

- Designed to provide ultimate pullout resistance.
- Available with TRI-SEAL® 1,000 hrs salt spray coating which is formulated for ACQ lumber applications.


### PANEL-TITE ULTRA 12

- Designed for fast installation and corrosion free performance.
- Assembled with EPDM bonded washer for exceptional weatherability.

### PANEL-TITE ULTRA 14

- Type 17 mill point eliminates splitting of wood.

## Fastener Sizes and Specifications

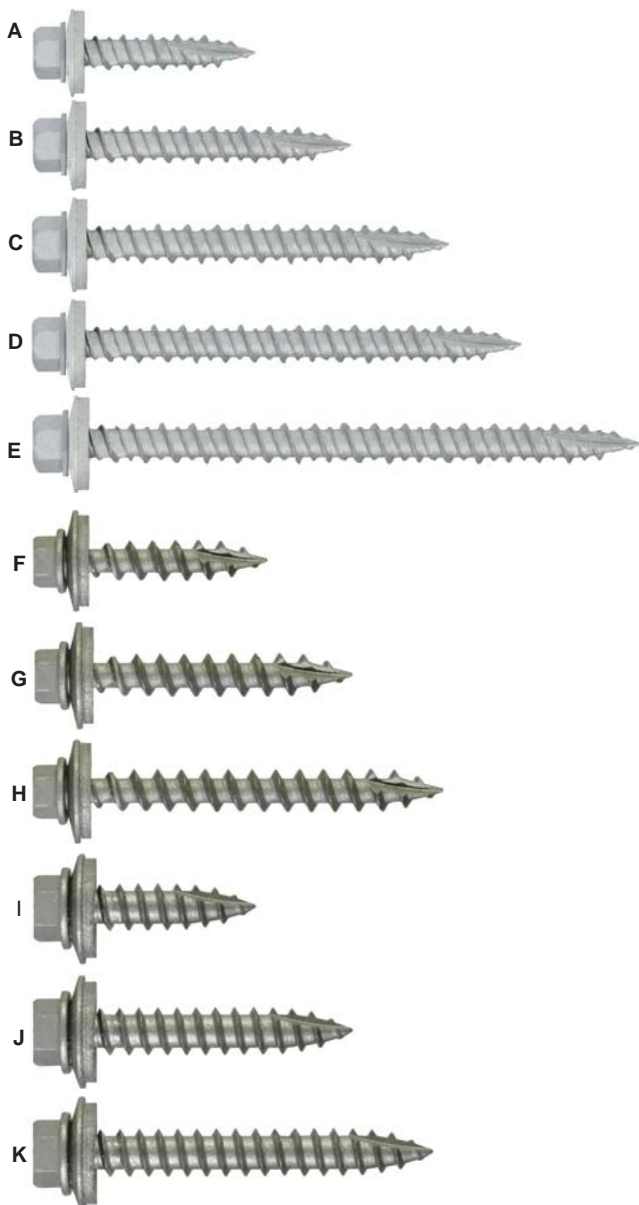

### Sizes

	Size	Attachment Thickness	Part #	Box Qty.
A	#10-14 x 1"	<.250"	DD10100HW17CSTSBW	3,000
B	#10-14 x 1-1/2"	<.750"	DD10150HW17CSTSBW	2,500
C	#10-14 x 2"	.500" - 1.250"	DD10200HW17CSTSBW	2,000
D	#10-14 x 2-1/2"	1.000" - 1.750"	DD10250HW17CSTSBW	1,500
E	#10-14 x 3"	1.500" - 2.250"	DD1030HW17CSTSBW	1,000
F	#12-8 x 1"	<.250"	12100HW17CSTABW	3,000
G	#12-8 x 1-1/2"	<.750"	12150HW17CSTABW	2,500
H	#12-8 x 2"	.500" - 1.250"	12200HW17CSTABW	2,000
I	#14-10 x 1"	<.250"	14100HWMCTABW	2,500
J	#14-10 x 1-1/2"	<.750"	14150HWMCTABW	2,500
K	#14-10 x 2"	.500" - 1.250"	14200HWMCTABW	2,000

Point Type: Type 17

Bagged 250 per bag

Drilling Thickness: 20ga. Max

### Paint



All fasteners can be painted with our Kalida-Kote paint finish to your exact color match.

Polyurethane with UV protection provides a chip resistant finish without chalking and fading.

**Do you need a long life head or a stainless steel screw?**

Please see Page 38!

