


410 STAINLESS STEEL DRILL SCREWS

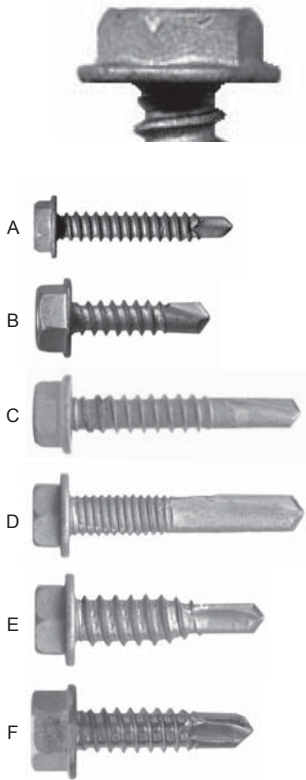

Available with Bonded Sealing Washer
Call for sizes

HEAD TYPE

#8 dia: 1/4" HWH
#10 dia: 5/16" HWH
#12 dia: 5/16" HWH
*1/4 dia: 5/16" HWH
1/4 dia: 3/8 HWH

- ▶ Provides corrosion resistance in mild atmospheres.
- ▶ Plated to resist surface rust and to reduce drive torque.
- ▶ For additional corrosion protection, specify TRI-SEAL™ long-life coating.

SIZES AND PERFORMANCE SPECIFICATIONS


Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity	
A	#8-18 x 1/2"	DP2	.036" - .100"	.205"	10M
	#8-18 x 3/4"	DP2	.036" - .100"	.455"	10M
B	#10-16 x 3/4"	DP3	.036" - .175"	.325"	7.5M
	#10-16 x 1"	DP3	.036" - .175"	.575"	5M
	#10-16 x 1-1/2"	DP3	.036" - .175"	1.075"	3M
C	#12-14 x 3/4"	DP3	.036" - .210"	.290"	5M
	*#12-14 x 1"	DP3	.036" - .210"	.525"	3.5M
	*#12-14 x 1-1/4"	DP3 LP	.036" - .210"	.550"	2.5M
	#12-14 x 1-1/2"	DP3	.036" - .210"	1.000"	2.5M
D	#12-14 x 2"	DP3	.036" - .210"	1.500"	2M
	*#12-14 x 1-1/4"	DP5	.250" - .500"	1.000"	5M
E	#12-14 x 1-1/2"	DP5	.250" - .500"	1.205"	5M
	*1/4-14 x 7/8"	DP1	.036" - .090"	.375"	2.5M
F	*1/4-14 x 1-1/8"	DP1	.036" - .090"	.875"	2.0M
	*1/4-14 x 3/4"	DP3	.036" - .250"	.210"	2.5M
F	*1/4-14 x 1"	DP3	.036" - .250"	.460"	2.5M
	*1/4-14 x 1-1/2"	DP3	.036" - .250"	.960"	2M
	1/4-14 x 2"	DP3	.036" - .250"	1.460"	1.5M

MATERIAL: 410 Stainless Steel

PLATING: Passivated (24hrs Salt Spray), Zinc Plated (48hrs Salt Spray),

* Denotes TRI-SEAL™ Coated (1,000hrs Salt Spray)

WOOD-TO-METAL DRILL SCREWS

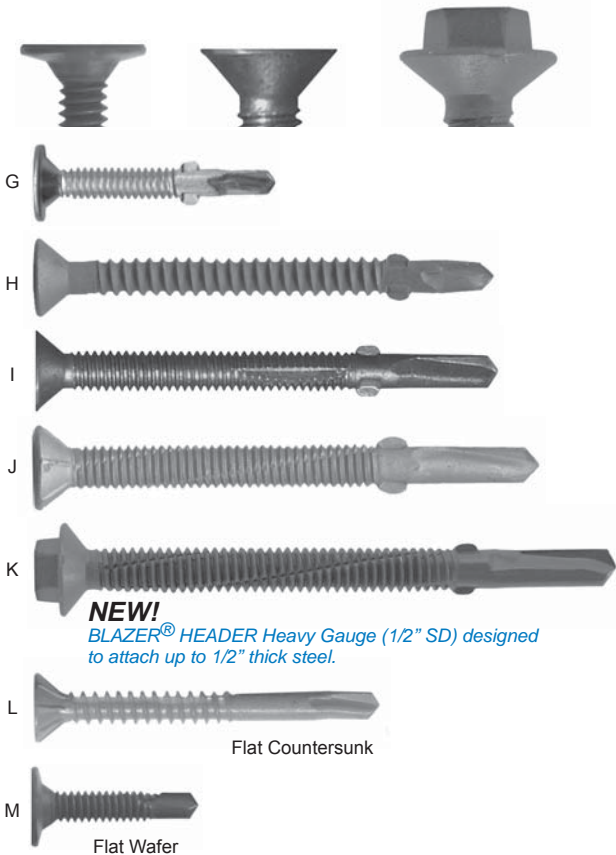

NEW!

BLAZER® HEADER Heavy Gauge (1/2" SD) designed to attach up to 1/2" thick steel.

Flat Countersunk

Flat Wafer

- ▶ Fasten wood-to-metal.
- ▶ No pre-drilling required.
- ▶ TRI-SEAL™ coated for use in ACQ lumber.

SIZES AND PERFORMANCE SPECIFICATIONS

Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity	
G	#10-24 x 1-7/16"	DP3 WW	.036" - .210"	.750"	4M
H	#12-14 x 1-3/4"	DP2 WW	.036" - .210"	.750"	2M
	#12-14 x 2-1/2"	DP2 WW	.036" - .210"	1.625"	1M
I	#12-24 x 2"	DP4 WW	.036" - .210"	1.250"	2M
	#12-24 x 2-1/2"	DP4 WW	.036" - .210"	1.750"	1M
J	1/4-20 x 2-3/4"	DP4 WW	.125" - .375"	2.000"	900
	1/4-20 x 3-1/4"	DP4 WW	.125" - .375"	2.750"	900
	1/4-20 x 3-3/4"	DP4 WW	.125" - .375"	3.000"	500
K	1/4-20 x 3-1/8"	DP5 WW	.125" - .500"	1.625"	1M

"WW" Denotes With Wings

MATERIAL: Carbon Steel

PLATING: .0003" min zinc TRI-SEAL™ Coated (1,000hrs Salt Spray)

Size	Point Type	Drilling Thickness	Attachment Thickness	Box Quantity	
L	#10-16 x 1-3/16"	DP3	.036" - .175"	.750"	2.5M
M	#10-24 x 3/4"	DP3	.036" - .210"	.375"	5M
	#10-24 x 1"	DP3	.036" - .210"	.500"	5M
	#10-24 x 1-1/4"	DP3	.036" - .210"	.750"	3.5M
	#10-24 x 1-1/2"	DP3	.036" - .210"	.875"	3M

MATERIAL: Carbon Steel

PLATING: .0003" min zinc TRI-SEAL™ Coated (1,000hrs Salt Spray)